

Electric
STAINLESS STEEL



**“AquaMAX sets a
new benchmark in electric water
heating with Stainless Steel”**


AUSTRALIAN MADE STAINLESS STEEL ELECTRIC WATER HEATERS

AQUAMAX STAINLESS STEEL ELECTRIC WATER HEATER SPECIFICATIONS

AquaMAX sets a new benchmark in electric water heating

- Stainless Steel Cylinder
- 10 year cylinder warranty¹
- Energy Efficient² - Up to 27% more efficient than MEPS
- No Anode
- Up to 50% Lighter³

*Note: AquaMAX Stainless Steel Water Heaters are not recommended for installation in some areas. Refer to the AquaMAX website for details of areas not recommended and for which product is not covered by warranty.

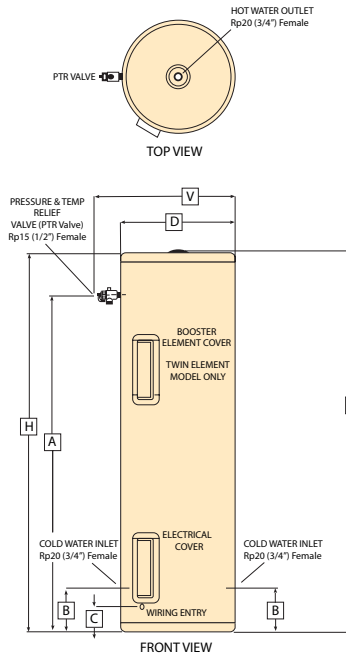

Water Heater Dimensions (mm)

	C	V	O	H	A	B	D
315	145	710	1760	1750	1540	230	620
250	145	710	1440	1430	1220	230	620
160	110	580	1615	1605	1425	185	487
125	110	580	1295	1285	1105	185	487
80	110	580	885	875	695	185	487

Note: Allow additional top clearance for hot outlet fittings and pipe work.

Stainless Steel Electric Specifications		315 Litre				250 Litre					160 Litre						125 Litre				80 Litre			
		E315S36-SS	E315S48-SS	E315T36-SS	E315T48-SS	E250S24-SS	E250S36-SS	E250S48-SS	E250T36-SS	E250T48-SS	E160S18-SS	E160S24-SS	E160S36-SS	E160S48-SS	E160T24-SS	E160T36-SS	E160T48-SS	E125S18-SS	E125S24-SS	E125S36-SS	E125S48-SS	E80S18-SS	E80S24-SS	E80S36-SS
Number of People Served		4-6	4-6	4-6	4-6	3-5	3-5	3-5	3-5	3-5	2-4	2-4	2-4	2-4	2-4	2-4	2-4	2-3	2-3	2-3	2-3	1-2	1-2	1-2
Hot Water Delivery	Litres	315	315	315	315	250	250	250	250	250	160	160	160	160	160	160	160	125	125	125	125	80	80	80
Boost Capacity (Twin Element)	Litres			62	62				52	52					46	46	46							
Weight (empty)	kg	55	55	55	55	45	45	45	45	45	40	40	40	40	40	40	40	30	30	30	30	25	25	25
Maximum Loading	Watts	3600	4800	3600	4800	2400	3600	4800	3600	4800	1800	2400	3600	4800	2400	3600	4800	1800	2400	3600	4800	1800	2400	3600
Heating Element Upper	Watts			3600	4800				3600	4800					2400	3600	4800							
Heating Element Lower	Watts	3600	4800	3600	4800	2400	3600	4800	3600	4800	1800	2400	3600	4800	2400	3600	4800	1800	2400	3600	4800	1800	2400	3600
Voltage (single phase)		240Vac				240Vac					240Vac						240Vac				240Vac			
Maximum Supply Pressure																								
- with expansion control valve		680 kPa				680 kPa					960kpa						960kpa				960kpa			
- without expansion control valve		800 kPa				800 kPa					1120 kPa						1120 kPa				1120 kPa			
Pressure & Temp Relief Valve		1000 kPa				1000 kPa					1400 kPa						1400 kPa				1400 kPa			
ECV setting		850 kPa				850 kPa					1200 kPa						1200 kPa				1200 kPa			
Thermostat setting (Maximum)		75°C				75°C					75°C						75°C				75°C			
Hot & Cold Water connection		Rp 20 (3/4") Female				Rp 20 (3/4") Female					Rp 20 (3/4") Female						Rp 20 (3/4") Female							
Warranty (Cylinder) ¹		10 years				10 years					10 years						10 years				10 years			
Warranty (Parts & Labour) ¹		1 year				1 year					1 year						1 year				1 year			
Protection rating		IPX4				IPX4					IPX4						IPX4				IPX4			
Watermark Licence No.		WMKA00200				WMKA00200					WMKA00200						WMKA00200				WMKA00200			
Electrical Safety Approval No.		SGSEA/120769				SGSEA/120769					SGSEA/120769						SGSEA/120769				SGSEA/120769			
Exceeds MEPS by:		20%		21%		22%			25%		15%			18%			20%			27%				

¹ Full warranty details available on request from AquaMAX . Call Toll Free 1800 676 000 or view at www.aquamax.com.au

² Refer to specification table for all models ³ 50% lighter than vitreous enamel models of the same capacity



AquaMAX Australia Pty Ltd 463-467 Warrigal Road Moorabbin Vic 3189 **Toll Free: 1800 676 000**
 Ph: (03) 9532 2200 Sales Fax: (03) 9532 5244 Service Fax: (03) 9556 5534 A.B.N. 37 138 189 689
 Email: sales@aquamax.com.au For more information visit www.aquamax.com.au

© Copyright 2012 AquaMAX Australia Pty Ltd. Neither whole nor part of this publication may be reproduced without permission. Materials, product data and specifications are subject to change without notice.

Part No AQ0905047-B

AQUAMAX
80L

AQUAMAX
125L

AQUAMAX
160L

AQUAMAX
250L

AQUAMAX
315L



*Stainless Steel cylinders can resist corrosion for longer than conventional vitreous enamel cylinders.**

10 YEAR CYLINDER WARRANTY¹

LIGHTER

Significantly lighter (up to 50%) than water heaters with conventional vitreous enamel cylinders, for easier handling.

NO ANODE

Unlike vitreous enamel cylinders, Stainless Steel cylinders DO NOT require a sacrificial anode to prevent corrosion. So there is no need for inspection or replacement of the anode over the life of the water heater.

ENERGY EFFICIENT

Exceeds MEPS (Minimum Energy Performance Standard) by up to 27%² for greater energy efficiency.

A SIZE FOR ANY HOME

Models from 80 litres to 315 litres for indoor or outdoor installation

STAINLESS STEEL FITTINGS

For all water connections.

TOP OF TANK HOT WATER OUTLET

Maximises quantity of hot water delivered. Universally fits either left or right handed installations.

TWIN ELEMENT OPTION

Available for heavy hot water demand in 160, 250 and 315L models.

27% **UP to 27%² more efficient than MEPS!**

ALL NEW Stainless Steel Electric Water Heaters

Experience the superior performance of stainless steel in the new AquaMAX Stainless Steel Electric Water Heater range. Stainless Steel cylinders resist corrosion for longer than conventional vitreous enamel with the added assurance of purity from the material of choice for kitchens and surgeries.

AquaMAX Stainless Steel Electric Water Heaters do not require sacrificial anode protection which, combined with significant weight advantages, make them easier to transport, install and maintain.



Stainless Steel fittings on all outlets.

