

The warmest way to start your day.

EVERHOT HOT WATER UNITS



everhot[®]
hot water units

A quality hot water system can really make a home. And when it comes to performance, Everhot delivers. That's why so many Australian families choose our reliable systems.

Everhot offers a full choice of Solar, Heat Pump, Continuous Flow, Gas and Electric units for mains water applications - with capacities to suit a range of family sizes and budgets. What's more, each of our hot water systems come with full warranty backing through the Reece national network.

Everhot. The warmest way to start your day.

Contents

Gas Boosted Solar	2-3
Heat Pumps	4-5
Continuous Flow	6
4 Star Gas Storage	7
5 Star Gas Storage	8-9
Electric Storage	10-13



Reece Product Quality Guarantee
All products enjoy a product replacement warranty.
For full warranty details visit
www.reece.com.au/productquality

Gas Boosted Solar

Everhot Gas Boosted Solar systems use the sun's energy to heat water, so they are much better for the environment.

We have an Everhot Gas Boosted Solar unit for everyone around the country, no matter where you live.




211220/2HBT-20G
211220/2HBT-26G

Product Features

- Enhanced Frost Protection – unique “powered” frost protection system using electronic controls to prevent frost damage if tank water temperature falls below 8-12°C
- Continuous Flow Gas Boosted Solar – enjoy endless, efficient hot water from the standard 20L/min gas booster or upgrade to a 26L
- Energy Efficient – with the total tank capacity available for solar heating and 5.9 to 6.0 star gas boosting, energy consumption can be reduced by over 60% (in Zone 4)
- High Efficiency Solar Collectors – 2 selective surface collectors to efficiently absorb energy from the sun
- Eligible for STC and State Government Rebates (Conditions apply)

specifications			
Tank Storage Volume	220 litres		
Plumbing	Left handed		
Gas Booster	20L/min Base, 26L/min Upgrade		
Solar Storage Tank		CF Booster	
		20L	26L
Height	1565mm	520mm	647mm
Width (without booster)	601mm	350mm	350mm
Depth	627mm	160mm	210mm
Weight (empty)	77kg	17kg	21kg
Warranty	10 Year Warranty – heat exchanger on booster 7 year cylinder 5 year solar collectors 3 year labour on cylinder & heat exchanger 1 year parts including labour on domestic installations only		

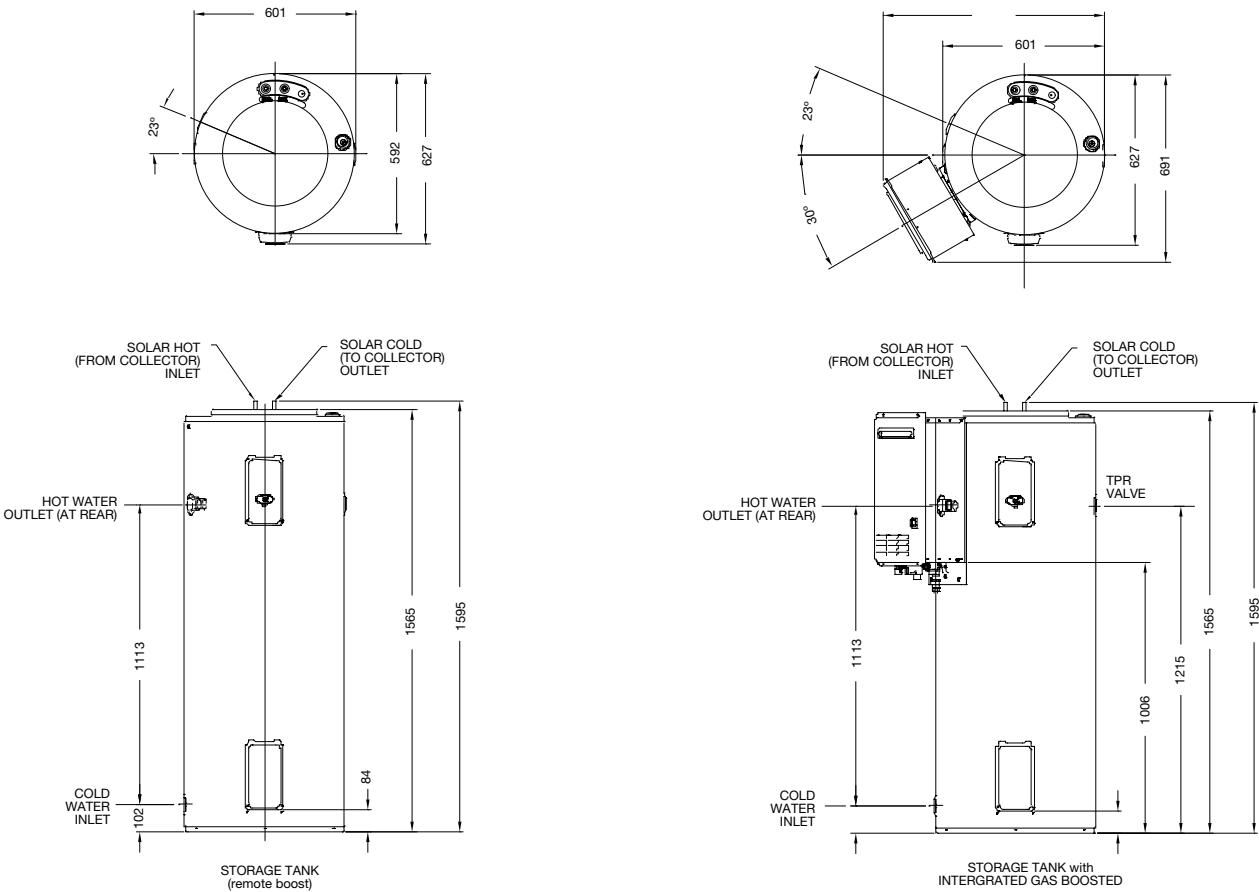

RECs zone map

For more information on Small-Scale Technology Certificates (STC's) visit: www.orcr.gov.au or www.reece.com.au



Heat Pumps

Everhot Heat Pumps deliver the very latest technology at an affordable price. As one of the most efficient hot water systems, they are a more environmentally friendly alternative to straight Gas and Electric storage systems.



Everhot 310 Integrated (high performance model)




Everhot 325L model shown. Also available in 270L & 410L models.

Everhot 310 Integrated

- Top-down heating
- Heats water to 60°C, which is available for immediate use
- Ground mounted installation (No solar panels)
- Two piece, site integrated design
- High performance model

specifications	
Tank capacity	310 L
Configuration	Integrated
Number of People	3 to 6
Power Input	1300 W
Heating Rate 1	71 L/hr
Refrigerant	R134a
Booster Capacity	220 L
Weight - Module	48 kg
Weight - Tank	87 kg
Total Weight	135 kg
Warranty	7 year cylinder 3 years labour on the cylinder 2 years on sealed system inc labour 1 year on all other parts and labour

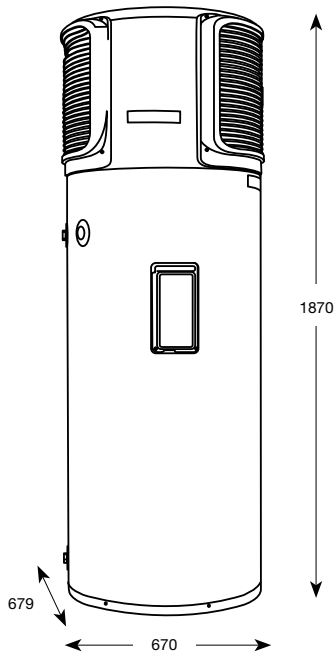

RECs zone map


For more information on Small-Scale Technology Certificates (STC's) visit: www.orcr.gov.au or www.reece.com.au

Everhot 270L, 325L & 410L Split System

- Ground mounted installation (No solar panels)
- Split design, allows the tank & heat pump module to be installed up to 4m's apart

specifications		* available in QLD and NTH NSW only		
		325	270	410
Tank capacity		325 L	270 L	410 L
Configuration		Split	Split	Split
Number of People		2 to 5	2 to 4	2 to 6
Power Input		800 W	800 W	800 W
Refrigerant		R134a	R134a	R134a
Booster Capacity		180 L	180 L	200 L
Weight - Module		46 kg	46 kg	46 kg
Weight - Tank		88 kg	71 kg	112 kg
Total Weight		134 kg	117 kg	158 kg
Warranty		7 year cylinder 3 years labour on the cylinder 2 years on sealed system inc labour 1 year on all other parts and labour		

*Unit weight totals only for shipping purposes
- system is split configuration.

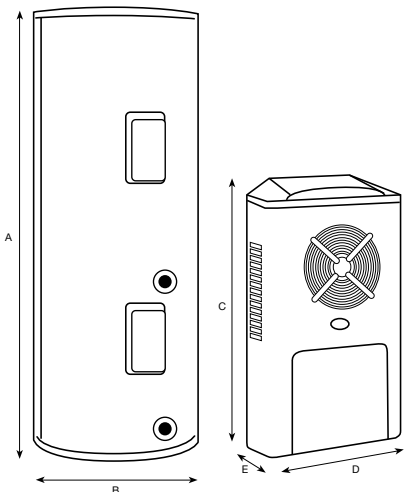

Dimensions - Tank			
	270	325	410
Height (A)	1382mm	1637mm	1842mm
Diameter / Width (B)	638mm	638mm	686mm
Dimensions - Module			
Height (C)	1034mm	1034mm	1034mm
Diameter / Width (D)	575mm	575mm	575mm
Depth (E)	332mm	332mm	332mm

Continuous Flow

Everhot Continuous Flow hot water units offer you all the pleasure of endless hot water in a compact, space saving design. With 5 star energy ratings, you can be rest assured you'll be doing your bit for the environment while keeping your gas bills low.



10 YEAR WARRANTY




CONTINUOUS FLOW

Everhot 20

- Never runs out of hot water
- 6.0 star energy rating
- Compact, space saving design
- 10 year warranty on heat exchanger
- Controllers available

specifications	
Flow Rate @ 25°C Temp Rise	20L/min
Thermal Input	153 MJ/hr
Number of People	3 to 4
Cabinet Dimensions	Height 520 mm Width 350 mm Depth 160 mm Overall Height 595 mm
Approx. Weight	15 kg Empty
Max. Water Supply Pressure	1000 kPa
Min. Water Supply Pressure	140 kPa
Min. Operating Flow Rate	2.7 L/min
Cold Water Connection	R 3/4 / 20
Hot Water Connection	R 3/4 / 20
Gas Connection	R 3/4 / 20
AGA Energy Rating	6.0 stars
Recess Box Code	1305314
Kitchen Temp. Controller Code	1300915
Bathroom 1 Temp. Controller Code	1300916
Bathroom 2 Temp. Controller Code	1300917
Warranty	10 year Heat Exchanger, 3 years parts and labour for domestic (non-commercial) installations only

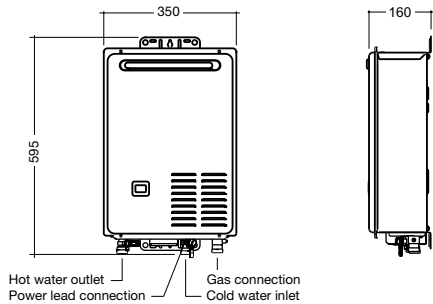

10 YEAR WARRANTY




CONTINUOUS FLOW

Everhot 26

- Never runs out of hot water
- 5.9 star energy rating
- Compact, space saving design
- 10 year warranty on heat exchanger
- Controllers available


specifications	
Flow Rate @ 25°C Temp Rise	26L/min
Thermal Input	199 MJ/hr
Number of People	4 to 6
Cabinet Dimensions	Height 565 mm Width 350 mm Depth 205 mm Overall Height 646 mm
Approx. Weight	21 kg Empty
Max. Water Supply Pressure	1000 kPa
Min. Water Supply Pressure	140 kPa
Min. Operating Flow Rate	2.7 L/min
Cold Water Connection	R 3/4 / 20
Hot Water Connection	R 3/4 / 20
Gas Connection	R 3/4 / 20
AGA Energy Rating	5.9 stars
Recess Box Code	1305314
Kitchen Temp. Controller Code	1300915
Bathroom 1 Temp. Controller Code	1300916
Bathroom 2 Temp. Controller Code	1300917
Warranty	10 year Heat Exchanger, 3 years parts and labour for domestic (non-commercial) installations only

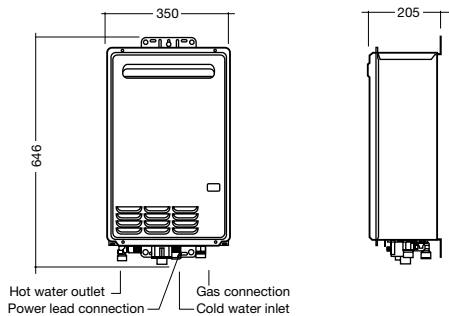

Product Features

- 4 Star energy efficient
- Two sizes: 135L and 170L capacity
- Natural and Propane gas models (Propane in 135L only)
- Strong recovery: 113L/hour
- 248/283L first hour capacity of hot water
- Easy, fast replacement for 3 Star units - same dimensions and fittings
- 7 Year cylinder warranty

specifications			
AGA GAS Energy Rating		4.3 stars	4 stars
Installation		External only	External only
Suitable for no. of people			
Moderate Climate		2-4	3-5
Cool Climate		2-3	3-4
Storage Capacity	Litres	135	170
Recovery Rate @ 45°C Rise	L/hr	113	113
First Hour Capacity	Litres	248	283
Anodes		2	2
Hourly Gas Consumption			
Natural Gas	MJ	27	27
Propane	MJ	26	–
Approx. Weight Empty	kg	59	69
Max. Supply Pressure			
with ECV	kPa	960	960
without ECV	kPa	1120	1120
T&PR Valve Setting	kPa	1400	1400
Water Hot and Cold Connections		RP ³ / ₄ /20	RP ³ / ₄ /20
Gas Connections		RP ¹ / ₂ /15	RP ¹ / ₂ /15
Dimensions			
A	mm	1558	1858
B	mm	422	422
C	mm	502	502
D	mm	988	1213
E	mm	328	403
F	mm	298	298
G	mm	1478	1778
K	mm	473	473
L	mm	208	208
M	mm	297	297
N	mm	97	97
Warranty		7 years on cylinder 1 year on parts and & labour	

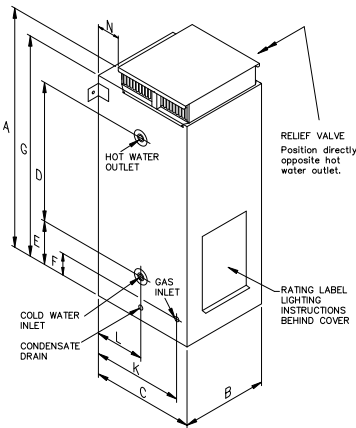

5 Star Gas Storage



Holding one of the highest energy efficiency star ratings for Gas Storage, the Everhot 5 star units not only help save the environment, they'll also save you money.



Everhot 270

- Full Mains pressure at multiple taps
- Natural and Propane gas models
- 5 star energy rating
- Compact design

specifications		
Gas Type	NG	Propane
AGA Energy Rating	5 stars	5 stars
Number of People	2 to 4	2 to 4
Cool Climate (No. of People)	2 to 3	2 to 3
Storage Capacity (litres)	135	135
Installation	External	
Recovery Rate @ 45°C (L/hr)	135	135
First Hour Capacity (litres)	270	270
Hourly gas consumption (MJ)	30	30
Weight (empty)	65	65
Max. Water Supply Pressure kPa (With ECV)	960	960
Max. Water Supply Pressure kPa (Without ECV)	1100	1100
Cold Water Connection	R ¾ / 20	R ¾ / 20
Gas Connection	G 1/2 / 15 Cn (flared compression)	
Warranty	7 year cylinder 1 yr parts and labour	

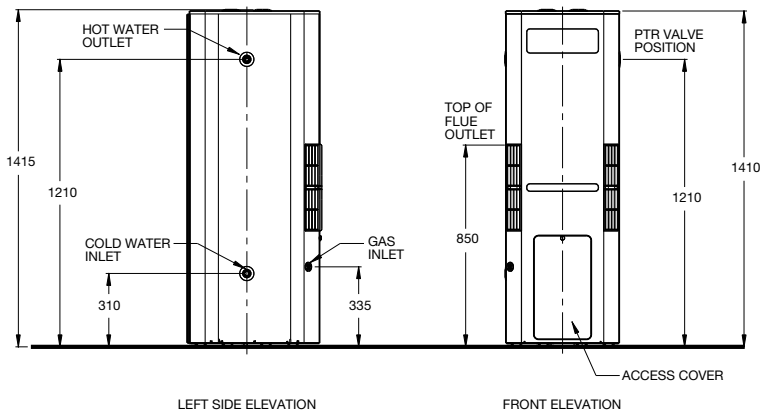


5 Star Gas Storage



Product Features

- 5 Star energy efficiency
- Natural and Propane gas models (Propane in 265 only)
- Strong recovery: 142L/hour
- 272L/302L first hour capacity of hot water
- Compact - 485mm diameter for easy replacement of 3 Star gas water heaters
- 7 Year cylinder warranty

specifications			
AGA GAS Energy Rating		5.3 stars	5.3 stars
Installation		External only	External only
Suitable for no. of people			
Moderate Climate		2-4	3-5
Cool Climate		2-3	3-4
Storage Capacity	Litres	130	160
Recovery Rate @ 45°C Rise	L/hr	142	142
First Hour Capacity	Litres	272	302
Anodes		1	1
Hourly Gas Consumption			
Natural Gas	MJ	30	30
Propane	MJ	30	–
Approx. Weight Empty	kg	75	85
Max. Supply Pressure			
with ECV	kPa	960	960
without ECV	kPa	1120	1120
T&PR Valve Setting	kPa	1400	1400
Water Hot and Cold Connections		RP¾/20	RP¾/20
Gas Connections		RP½/15	RP½/15
Dimensions			
A	mm	1622	1922
B	mm	485	485
C	mm	556	556
D	mm	988	1213
E	mm	328	409
F	mm	298	298
G	mm	600	600
K	mm	520	520
L	mm	240	240
M	mm	297	297
N	mm	97	97
Warranty		7 years on cylinder, 1 year on parts & labour	

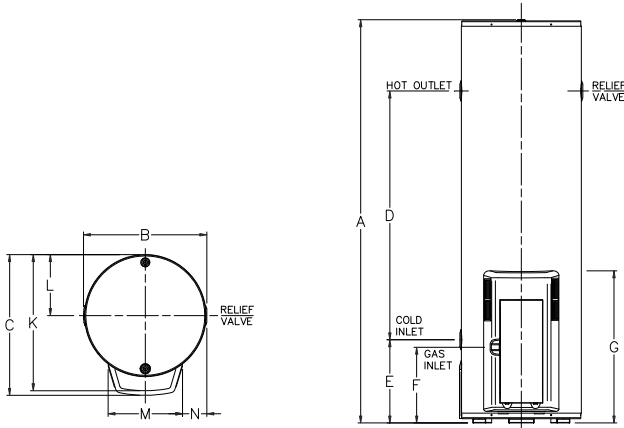

Electric Storage

Everhot small electric hot water units are ideal for small spaces with limited hot water demand.



7 YEAR
QUALITY GUARANTEE



DUAL HANDED



ELECTRIC


Product Features

- Fast, easy like-for-like replacement
- Dual handed inlet, outlet and T&PR fittings
- All models feature smaller diameters, making for an easier fit into confined spaces
- 25L & 50L models include plug-in models
- Proven reliability
- 7 year cylinder warranty, 3 years labour on cylinder¹



MODEL		25	50	80	125
Everhot® Dual Handed Single Element					
Hot Water Delivery	Litres	18	50	80	125
kW Rating	1.8	–	–	–	✓
	2.4	✓	–	–	–
	3.6	✓	✓	✓	–
Relief Valve Setting	kPa	1000	1000	1000	1000
Expansion Control Valve (kPa)	kPa	850	850	850	850
Max Water Supply Pressure:					
with ECV (kPa)	kPa	680	680	680	680
without ECV (kPa)	kPa	800	800	800	800
Water Connections		RP ³ / ₄ /20	RP ³ / ₄ /20	RP ³ / ₄ /20	RP ³ / ₄ /20
Dimensions					
A	mm	440	695	945	1340
B	mm	370	400	480	480
C	mm	404	436	515	515
D	mm	94	397	702	1102
E	mm	165	142	64	64
F	mm	75	80	66	66
H	degrees	29	26	24	24
J	degrees	90	59	60	60
Approx. Weight (Empty)	kg	14	29	36	49

Warranty	7 years on cylinder, 3 years labour on cylinder and 1 year components
----------	---

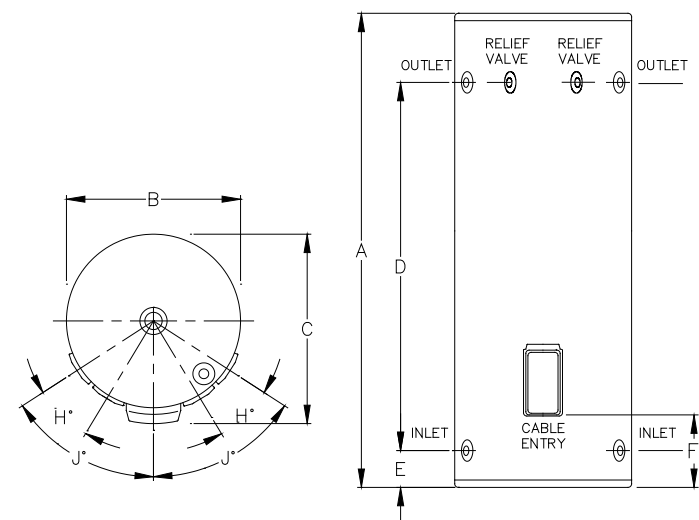

Electric Storage

Everhot electric hot water heaters provide an easy option when replacing an existing electric hot water unit. Water is heated quickly providing an affordable solution for your hot water needs.



Product Features


- Fast, easy like-for-like replacement
- Dual handed inlet and outlet fittings
- 7 year cylinder warranty
- All models suit connection to concessional (off-peak) tariffs
- Proven reliability
- Made in Australia*



160L - 400L Everhot Electric Product*

MODEL		160	250	315	400
Everhot® Dual Handed Single Element					
Hot Water Delivery	Litres	160	250	315	400
kW Rating	2.4	✓	–	–	–
	3.6	✓	✓	✓	–
	4.8	–	✓	✓	✓
Relief Valve Setting	kPa	1000	1000	1000	1000
Expansion Control Valve (kPa)	kPa	850	850	850	850
Max Water Supply Pressure:					
with ECV (kPa)	kPa	680	680	680	680
without ECV (kPa)	kPa	800	800	800	800
Water Connections		RP ³ / ₄ /20	RP ³ / ₄ /20	RP ³ / ₄ /20	RP ³ / ₄ /20
Dimensions					
A	mm	1610	1395	1640	1840
B	mm	480	640	640	690
C	mm	515	700	700	755
D	mm	1332	1117	1317	1479
E	mm	104	73	113	121
F	mm	66	103	103	105
H	degrees	23	32	32	30
J	degrees	58	88	88	83
M	mm	58	92	92	97
Approx. Weight (Empty)	kg	55	76	97	118

Warranty	7 years on cylinder, 3 years labour on cylinder and 1 year components
----------	---

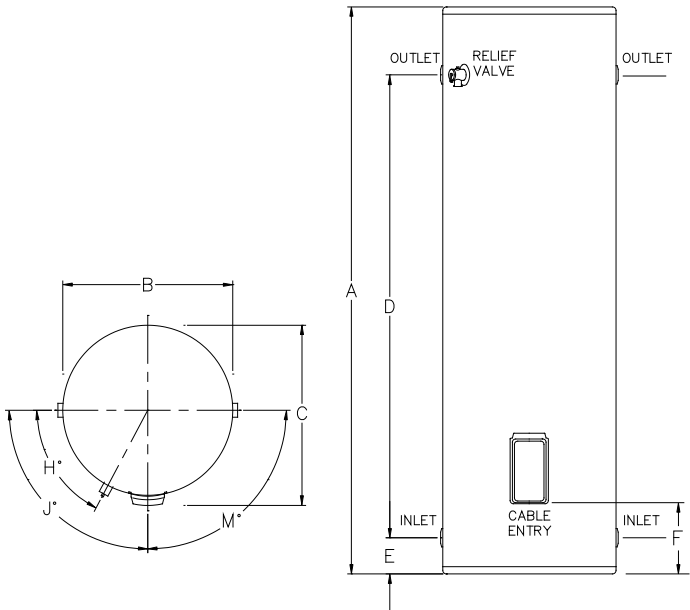

Don't risk it, use a licensed plumber.™

Once you have chosen your new hot water system you will need a professional to install it for you. Always use a licensed plumber and electrician and ensure that your system is serviced to manufacturer instructions.

Reece. Works for you.™

Call 1800 032 566 or visit www.reece.com.au for your nearest Reece branch.

Due to limitations in the printing process the colours in this brochure are a guide only.

All products enjoy a product replacement warranty. For full warranty details visit www.reece.com.au/productquality

V6 [BROCHURE CODE 2130177]

everhot®

