



RHEEM STELLAR® – 5 STAR GAS STORAGE



GAS



5 STAR
RATING

2 - 6

PEOPLE

330 L or
360 L

FIRST HOUR
CAPACITY

10
YEAR

WARRANTY¹



FEATURES

- **5 Star energy efficiency** – uses less gas than 3 or 4 Star water heaters, lowering greenhouse gas emissions
- **Advanced technology** – the Stellar Superflue® increases both efficiency and performance, reducing energy consumption and saving you money
- **Mains pressure at multiple taps** – to service multiple hot water demands at once
- **200 litre per hour recovery** – more than you will likely need!
- 10 Year Warranty¹
- Designed for durability
- Australian made

WHY CHOOSE RHEEM GAS STORAGE HOT WATER?

- Designed for Australia's tough conditions, using 70 years of experience
- Capacities to suit different family sizes and hot water requirements
- Fast hot water recovery
- Mains Pressure water delivery for steady, hot and strong® hot water
- Full technical support through Rheem's National Service Network
- Available to suit Natural Gas or Propane



COMES ON STEADY, HOT AND STRONG

INSTALL A





RHEEM STELLAR® – 5 STAR GAS STORAGE

5 STAR ENERGY EFFICIENCY


A 5 star energy efficiency rating, 10 year warranty¹ and sleek styling make Rheem Stellar Rheemarkable!

Rheem Stellar offers premium efficiency and durability, thanks to the ingenious Stellar SuperFlue® – saving you both energy and money.

Rheem Stellar is the first Australian made water heater to achieve 89% thermal efficiency. With its 5 Star energy rating and innovative design, your choice of water heater just got a lot easier.

ADVANCED TECHNOLOGY

The Rheem Stellar SuperFlue® increases both efficiency and performance by absorbing more energy from the flue gases whilst resisting against the corrosive effects of heat and condensation – reducing energy consumption and saving you money.

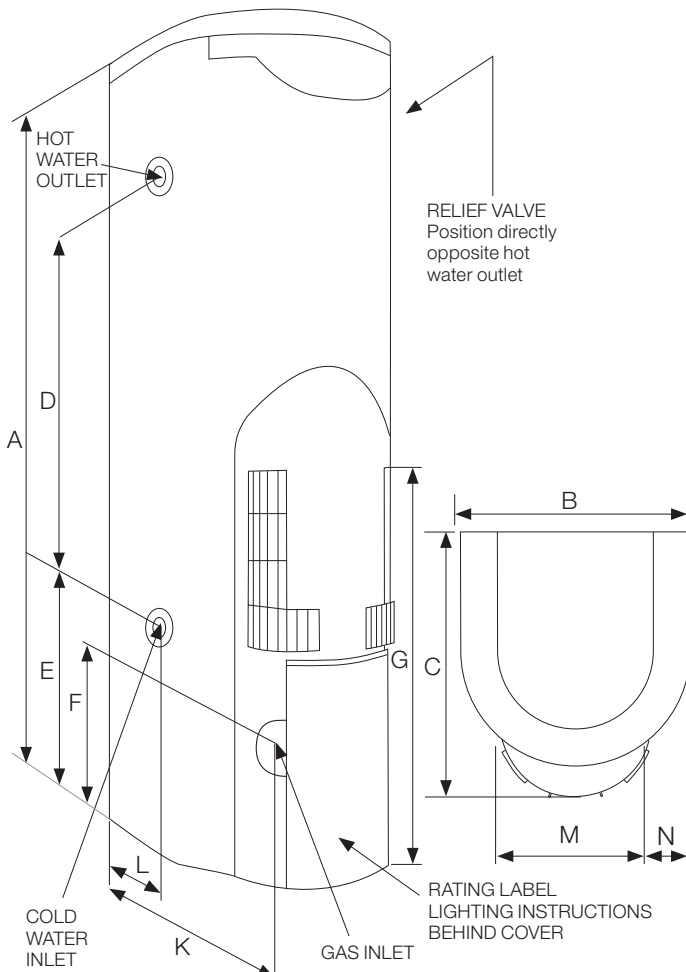

MODEL ²		850330	850360
Storage Capacity	Litres	130	160
Recovery Rate @ 45°C Rise	L/hr	200	200
First Hour Capacity ³	Litres	330	360
Hourly Gas Consumption			
Natural Gas	MJ	42	42
Propane	MJ	42	42
Butane	MJ	39	39
Approx. Weight Empty	kg	70	80
Approx. Weight Full	kg	200	240
Relief Valve Setting	kPa	1400	1400
Expansion Control Valve Setting	kPa	1200	1200
Max. Supply Pressure			
without ECV	kPa	1120	1120
with ECV ⁴	kPa	960	960
Water Connection LHS		RP¾/20	RP¾/20
Gas Connection		RP½/15	RP½/15
AGA GAS Energy Rating		5 Stars	5 Stars
Suitable for No. of People		2-5†	3-6†
Dimensions			
A (Height)	mm	1600	1900
B (Width)	mm	485	485
C (Depth)	mm	558	558
D	mm	988	1213
E	mm	328	409
F	mm	298	298
G	mm	770	770
K	mm	520	520
L	mm	252	252
M	mm	299	299
N	mm	93	93

¹ Warranty.

10 years Cylinder and SuperFlue warranty, 5 years labour on Cylinder and SuperFlue, 1 year parts & labour warranty on all other components. For Domestic (non-commercial) installations. Conditions apply. See the Rheem warranty set out in the product Owner's Guide or view at www.rheem.com.au/warranty.

² Model numbers: N=Natural, P=Propane, B=Butane, Letter N, P, or B is included in the model number, eg 850360N0, to denote gas type.

³ First hour capacity is the storage capacity plus nominal first hour recovery rate at 45°C temperature rise using Natural Gas.

⁴ ECV not supplied.

† Guide only, subject to individual hot water consumptions patterns.

Materials and data are subject to change without notice.

® Registered Trademark of Rheem Australia Pty Ltd.

™ Trademark of Rheem Australia Pty Ltd.



Rheem Australia Pty Ltd.

1 Alan Street, Rydalmere, New South Wales 2116, Australia
PO Box 6, Rydalmere, New South Wales 2116, Australia.

