


STACKED THE DECK IN YOUR FAVOUR.

When it comes to building a better lawn mower, what's doing the actual mowing should never be an afterthought. Which is why our engineering department worked so hard to perfect our X-Factor® 3 deck. It's specially designed with integrated baffles for superior airflow. That means better grass dispersion, so it cuts grass finer and avoids clogging. This is a heavy-duty deck made of seven-gauge steel, but also available in 10-gauge for certain applications. It's even reinforced in its high-contact areas for extra durability. Toolless removable belt-guards make maintenance a snap and its rugged discharge chute has just enough give to be kind to trees and shrubs. We truly factored in every detail for the ultimate deck, leaving only the finest results in its path.



WHAT UNITS FEATURE THIS DECK?

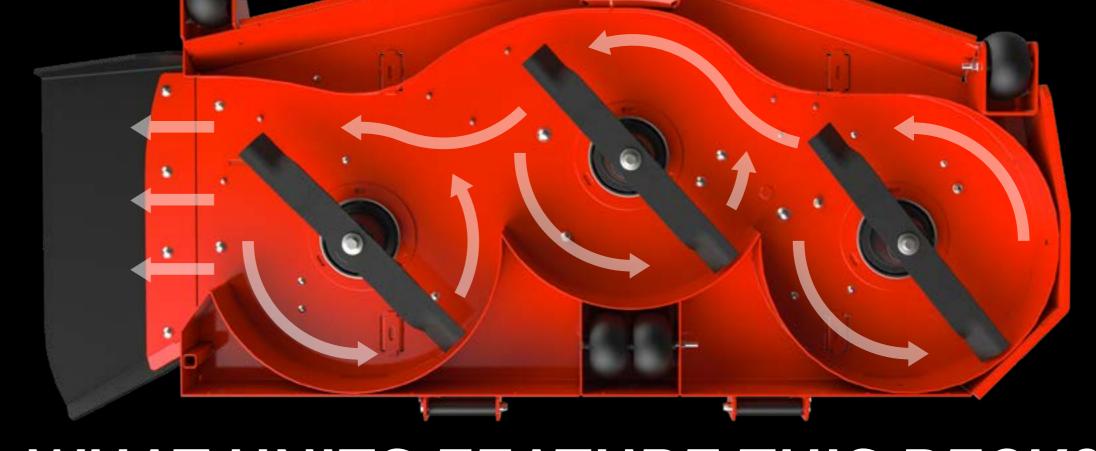





COMMERCIAL PEDIGREE. RESIDENTIAL ADDRESS.

For homeowners who take their lawn care seriously. The ZT X brings commercial grade precision and legendary Gravely performance to your backyard. This mower isn't just for anyone, just those who want to upgrade their lawn game.

11-GAUGE FABRICATED DECK - Our 4.5-inch-deep fabricated deck features an optimized airflow design to produce best-in-class cut quality and discharge performance.

FULLY WELDED TUBULAR FRAME - This fully welded tubular frame is a professional-grade backbone tough enough to get the job done in your backyard.

CUT SELECTION - We cut out the pins and levers to offer a simple and intuitive cutting selection solution. Press the pedal to raise the deck, and turn the dial.





Specifications subject to change without notice. Images for illustrative purposes only.

ZT X 48"

Kawasaki® FR651 V-Twin Engine / 21.5 HP 11.2 km/h forwards / 4.8 km/h backwards 10.5 L Fuel Capacity / 273.5 KG

ZT X 52"

Kawasaki® FR691 V-Twin Engine / 23 HP 11.2 km/h forwards / 4.8 km/h backwards 10.5 L Fuel Capacity / 291.2 KG

SKU: AGU915276



CUTS BIG JOBS DOWN TO SIZE.

The professional-grade quality of the ZT XL was built for big jobs.

This is a residential machine with heavy-duty features that makes users forget they're not on a commercial mower.

FULLY WELDED TUBULAR FRAME - This fully fabricated tubular frame is welded into a single piece, providing a strong, stable backbone you won't get from a competitive bolted, multi-sectional frame.

HYDRO-GEAR® TRANSAXLES - The Hydro-Gear® ZT-2800® transaxles provide increased torque, a smoother ride, and longer life.

11-GAUGE FABRICATED DECK - Our 4.5-inch-deep fabricated deck features an optimized airflow design to produce best-in-class cut quality and discharge performance.





Specifications subject to change without notice. Images for illustrative purposes only.

ZT XL 42"

Kawasaki® FR651 V-Twin Engine / 21.5 HP 12 km/h forwards / 4.8 km/h backwards

10.5 L Fuel Capacity / 300.7 KG

ZT XL 48"

Kawasaki® FR691 V-Twin Engine / 23 HP 12 km/h forwards / 4.8 km/h backwards 10.5 L Fuel Capacity / 304.3 KG

ZT XL 52"

Kawasaki® FR691 V-Twin Engine / 23 HP 12 km/h forwards / 4.8 km/h backwards 10.5 L Fuel Capacity / 308.8 KG

ZT XL 60"

Kawasaki® FR730 V-Twin Engine / 24 HP 12 km/h forwards / 4.8 km/h backwards 10.5 L Fuel Capacity / 316.1 KG

SKU: AGU915264

SKU: AGU915263

SKU: AGU915262



EXPECTATIONS ELEVATED.

More style, more comfort, more speed, and more precision have made the ZT HD one of the top selling machines in its class. It was built to commercial standards for power and durability. The only thing that makes it a residential mower is its address.

CUT SELECTION - Offers 15 cutting positions, ranging from 1.5 inches to 5 inches, to make your lawn look its best.

X-FACTOR® 3 DECK - The deck has been completely redesigned for better grass dispersion. Its new look is constructed from 10-gauge steel to deliver years of solid performance.

FULLY WELDED TUBULAR FRAME - The ZT HD offers a superior and more robust welded tubular frame, giving you the integrity of a commercial frame in a residential package.





60" Deck Shown.



Specifications subject to change without notice. Images for illustrative purposes only.

18.8 L Fuel Capacity / 365.1 KG **ZT HD 48**"

ZT HD 44"

Kawasaki® FR691 V-Twin Engine / 23 HP 12.8 km/h forwards / 6.4 km/h backwards 18.8 L Fuel Capacity / 374.2 KG

Kawasaki® FR651 V-Twin Engine / 21.5 HP

12.8 km/h forwards / 6.4 km/h backwards

ZT HD 52"

Kawasaki® FR691 V-Twin Engine / 23 HP 12.8 km/h forwards / 6.4 km/h backwards 18.8 L Fuel Capacity / 385.5 KG

ZT HD 60"

Kawasaki® FR730 V-Twin Engine / 24 HP 12.8 km/h forwards / 6.4 km/h backwards 18.8 L Fuel Capacity / 394.6 KG

SKU: AGU991266

SKU: AGU991268

SKU: AGU991270




A SUPERIOR CUT COUPLED WITH SUPERIOR COMFORT.

All-day comfort matters just as much as leaving a perfectly cut lawn. The Pro-Turn® Z delivers both. It's packed with commercial grade features while staying true to its attractive baseline price. On top of all that, it maintains Gravely's signature durability.

SUSPENSION FORKS - Absorb those big impacts so your body doesn't, further improving the ride and decreasing fatigue.

X-FACTOR® 3 DECK - The deck has been completely redesigned for better grass dispersion. Its new look is constructed from 10-gauge steel to deliver years of solid performance.

SEAT ISOLATION - Enjoy an improved ride thanks to its seat isolation system. This system removes the vibrations that can cause fatigue so you can mow in comfort further and longer.







Specifications subject to change without notice. Images for illustrative purposes only

PRO-TURN Z 48"

SKU: AGU991280

Gravely® 764 Pro Filtration V-Twin Engine / 26.5 HP 12.8 km/h forwards / 6.4 km/h backwards 18.8 L Fuel Capacity / 419.5 KG

PRO-TURN Z 52"

Gravely® 764 Pro Filtration V-Twin Engine / 26.5 HP 12.8 km/h forwards / 6.4 km/h backwards 18.8 L Fuel Capacity / 422.2 KG

PRO-TURN Z 60"

Gravely® 764 Pro Filtration V-Twin Engine / 26.5 HP 12.8 km/h forwards / 6.4 km/h backwards 18.8 L Fuel Capacity / 431.8 KG

ZT X **ZT XL**

	ZIX							
	48	52	42	48	52	60		
MODEL NUMBER	AGU915276	AGU915257	AGU915262	AGU915261	AGU915263	AGU915264		
ENGINE	Kawasaki® FR651V	Kawasaki® FR691V	Kawasaki® FR651V	Kawasaki® FR691V	Kawasaki® FR691V	Kawasaki® FR730V		
HORSEPOWER / DISPLACEMENT	21.5 HP / 726 CC	23 HP / 726 CC	21.5 HP / 726 CC	23 HP / 726 CC	23 HP / 726 CC	24 HP / 726 CC		
DRIVE SYSTEM	Hydro-Gear® ZT2	2200 Transaxles		Hydro-Gear® ZT-2	2800® Transaxles			
FUEL CAPACITY			10	5 L				
GROUND SPEED (APPROX. K/PH - Forward / Reverse)		M/H Forwards 12 KM/H Forwards 4.8 KM/H Backwards						
DECK								
DECK MATERIAL			11	GA.				
DECK CONSTRUCTION			Fabr	icated				
NUMBER OF SPINDLES				3				
BLADE TIP SPEED (FPM)			18,00	0 FPM				
SPINDLE HOUSING MATERIAL			St	eel				
SPINDLE BEARINGS			Sealed	Bearings				
DECK ENGAGEMENT			Electric	Warner®				
DECK LIFT SYSTEM			Foot Operated	. Dial Selection				
CUTTING WIDTH	48 Inch	52 Inch	42 Inch	48 Inch	52 Inch	60 Inch		
CUTTING POSITIONS / HEIGHT			13 Cutting Positions	(38.1 MM - 114 MM)				
WHEELS								
FRONT			11 X 6 - 5 Smc	ooth Pneumatic				
REAR	20 x 10	- 8 Turf	20 x 8 - 10 Turf	20 x 10 ·	- 10 Turf	20 x 12 - 10 Turf		
FEATURES								
SEAT	18 Inch Plush High Bacl	k W/ Padded Arm Rests	18 Inch Plu	ish High Back W/ Padded Arm R	ests. Seat Slider & Seat Isolatio	n Standard		
FOLDABLE ROPS			N	/A				
MACHINE								
WEIGHT	273.5 KG	291.2 KG	300.7 KG	304.3 KG	308.8 KG	316.1 KG		
LENGTH			1968	.5 MM				
WIDTH (w/ Chute Up w/ Chute Down)	1384.3 MM 1530 MM	1413 MM 1630.6 MM	1170.9 MM 1379.2 MM	1384.3 MM 1530 MM	1413 MM 1630.6 MM	1636 MM 1872 MM		
HEIGHT (w/ ROPS UP w/ ROPS Down)	1038.	.8 MM		1066.	8 MM			
WARRANTY								

4 Year / 400 Hour

3 Year / 300 Hour

ZT HD

PRO-TURN Z	
------------	--

	44	48	52	60	48	52	60			
MODEL NUMBER	AGU991266	AGU991268	AGU991270	AGU991272	AGU991280	AGU991282	AGU991284			
ENGINE	Kawasaki® FR651V	Kawasaki® FR691V	Kawasaki® FR691V	Kawasaki® FR730V	Gravely® 764 Pro	Gravely® 764 Pro	Gravely® 764 Pr			
HORSEPOWER / DISPLACEMENT	21.5 HP / 726 CC	23 HP / 726 CC	23 HP / 726 CC	24 HP / 726 CC	26.5 HP / 764 CC	26.5 HP / 764 CC	26.5 HP / 764 C			
DRIVE SYSTEM		Hydro-Gear® ZT-3100® Transaxles								
FUEL CAPACITY		18.8 L								
GROUND SPEED (APPROX. K/PH - Forward / Reverse)		12.8 KM/H Forwards 6.4 KM/H Backwards 12.8 KM/H Forwards 6.4 KM/H Backwards								
DECK										
DECK MATERIAL		10	GA.		10 GA. S	teel W/ 10 GA. Spindle Reinf	orcement			
DECK CONSTRUCTION		Fabricated X-Factor® 3								
NUMBER OF SPINDLES		3								
BLADE TIP SPEED (FPM)	18,000 FPM									
SPINDLE HOUSING MATERIAL	Forged Aluminium									
SPINDLE BEARINGS	Sealed Bearings									
DECK ENGAGEMENT		Electric	c Ogura®			Ogura® GT1.5 Electric Clutcl	า			
DECK LIFT SYSTEM				Foot Operated						
CUTTING WIDTH	44 Inch	48 Inch	52 Inch	60 Inch	48 Inch	52 Inch	60 Inch			
CUTTING POSITIONS / HEIGHT			15 Cu	tting Positions (38.1 MM - 1	27 MM)					
WHEELS										
FRONT				13 x 6.50-6 Smooth						
REAR	22 x 10	- 12 Turf	22 x 10.5 - 12 Turf	22 x 12 - 12 Turf	22 x 10 - 12 Turf	22 x 10.5 - 12 Turf	22 x 12 - 12 Tu			
FEATURES						·				
SEAT			High Back Com	fort W/ Seat Isolation & Pag	dded Arm Rests					
FOLDABLE ROPS		Opt	ional			Standard				
MACHINE										
WEIGHT	365.1 KG	374.2 KG	385.5 KG	394.6 KG	419.5 KG	422.2 KG	431.8 KG			
LENGTH				2006.6 MM						
WIDTH (w/ Chute Up w/ Chute Down)	1209.4 MM 1493.5 MM	1290.3 MM 1572.2 MM	1427.4 MM 1709.4 MM	1618 MM 1900 MM	1290.3 MM 1572.2 MM	1427.5 MM 1709.4 MM	1617.9 MM 1899.9 MM			
HEIGHT (w/ ROPS UP w/ ROPS Down)		1193	8.8 MM			1828.8 / 1320.8 MM				
WARRANTY										
UNIT		4 Year /	500 Hour			4 Year / 750 Hour				



GRAVELY 44" Deck Shown. 20 gravely.com.au

SMALL FRAME. BIG RESULTS.

Its size takes you where bigger mowers can't, like through gates as narrow as 36". But this smaller, nimbler ride is still loaded with big-time features. Powerful, durable, with maximum versatility. The Compact-Pro represents full commercial strength, brought down to size.

FUEL TANK DESIGN - Increases stability and improves machine handling and visibility.

KAWASAKI ENGINE - Powered by a Kawasaki® FX Engine that touts a heavy-duty canister air cleaner to optimize performance in all conditions and extend engine life.

SMALLER FOOTPRINT - The Compact-Pro® easily passes through gates as narrow as 36 inches and nimbly maneuvers around common residential obstacles.



Specifications subject to change without notice. Images for illustrative purposes only.

COMPACT-PRO 34"

Kawasaki® FX481 V-Twin Engine / 15.5 HP 11.2 km/h forwards / 4.8 km/h backwards 27.1 L Fuel Capacity / 334.2 KG

COMPACT-PRO 44"

Kawasaki® FX600 V-Twin Engine / 19 HP 11.2 km/h forwards / 4.8 km/h backwards 27.1 L Fuel Capacity / 357.8 KG



GET BANG FOR YOUR BUCK.

Don't let its price-point fool you. The Pro-Turn® ZX still delivers a great Gravely performance, making it great value. Its solid construction can handle the toughest commercial jobs and leave a beautifully manicured lawn behind it. This is definitely a "big return on a small investment" situation.

AN AUTOMOTIVE-STYLE TUBULAR FRAME - It's unique to the mowing industry and increases durability by withstanding force from any direction. This high-strength, premium frame is positioned with a lower center of gravity to improve stability while mowing on hillsides.

ZT-3200® TRANSAXLES - They're more heavy duty and can handle higher speeds. They're also commercial grade and serviceable for a longer life span.

X-FACTOR® 3 DECK - The deck has been completely redesigned for better grass dispersion. Its new look is constructed from 10-gauge steel to deliver years of solid performance.







Specifications subject to change without notice. Images for illustrative purposes only.

PRO-TURN ZX 48"

Kawasaki® FX691 V-Twin Engine / 22 HP 13.6 km/h forwards / 6.4 km/h backwards 18.8 L Fuel Capacity / 419.5 KG

PRO-TURN ZX 52"

Kawasaki® FX691 V-Twin Engine / 22 HP 13.6 km/h forwards / 6.4 km/h backwards 18.8 L Fuel Capacity / 422.2 KG

SKU: AGU991288

PRO-TURN ZX 60"

Kawasaki® FX730 V-Twin Engine / 23.5 HP 13.6 km/h forwards / 6.4 km/h backwards 18.8 L Fuel Capacity / 431.8 KG



SUCCESS IS CONTAGIOUS.

Consistent cutting results, comfort for the long haul, and a choice of three sized mower decks make the Pro-Turn® 100 great value. It can handle the toughest jobs you can dish out and will be ready for more the next day.

CBT SYSTEM - Our exclusive Constant Belt Tension System (CBT) ensures that belt tension is constant, keeping the blade tip speed and cutting results consistent.

X-FACTOR® II DECK - The 7-gauge deck is fabricated from top to bottom, it provides industrial-strength peace of mind.

SEATING SYSTEM - A full suspension seat provides improved lateral stability with added vibration control and a 4-inch seat slide for all-day comfort.







Specifications subject to change without notice. Images for illustrative purposes only.

PRO-TURN 100 148"

Kawasaki® FX691 V-Twin Engine / 22 HP 16 km/h forwards / 8 km/h backwards 37.7 L Fuel Capacity / 481.7 KG

PRO-TURN 100 152"

Kawasaki® FX691 V-Twin Engine / 22 HP 16 km/h forwards / 8 km/h backwards 37.7 L Fuel Capacity / 489.4 KG

PRO-TURN 100 160"

Kawasaki® FX730 V-Twin Engine / 23.5 HP 16 km/h forwards / 8 km/h backwards 37.7 L Fuel Capacity / 508.4 KG



WHERE OVERGROWN GRASS BECOMES JUST GRASS.

Whether it's thick wet conditions, overgrown properties, or stalky grasses in its path, the Mach One easily cuts it down to size. Its High-Volume Output deck with tunnel chamber directs clippings away from the blades after they're cut to keep them from bogging down.

HIGH-VOLUME OUTPUT (HVO) DECK - The HVO deck provides increased depth from trim side to discharge side so it can process greater material volume.

TUNNEL GEOMETRY - An advanced cutting chamber is formed by setting the blades back four inches from the front of the deck for less clumping and even grass dispersion.

CBT SYSTEM - Our exclusive Constant Belt Tension System (CBT) ensures belt tension is maintained, keeping the blade tip speed and cutting results consistent.





Specifications subject to change without notice. Images for illustrative purposes only.

PRO-TURN MACH ONE 60"

Kawasaki® FX921 V-Twin / 31 HP 20.9 km/h forwards / 9.6 km/h backwards 50.6 L Fuel Capacity / 624.6 KG



HIGH-VOLUME OUTPUT (HVO) DECK



TUNNEL GEOMETRY





MEET THE NEW EMPLOYEE OF THE MONTH FOR THE FORESEEABLE FUTURE.

When you add a Pro-Turn 600 to your crew, it's kind of like adding another employee. It cuts faster and more efficiently, handling more work in less time. Its Operator Pod System was designed to keep you moving comfortably sunrise to sunset, cutting back on driver fatigue. Best of all, it will impress both your clients and any potential crew members because they'll see you only use the best.

X-FACTOR® 3 DECK - The deck has been completely redesigned for better grass dispersion. Its new look is constructed from 7-gauge steel to deliver years of solid performance.

LARGE-DIAMETER TIRES - Both the front and rear tyres provide a smoother ride and more traction in varying conditions.

OPERATOR POD SYSTEM - There's nothing like it in the industry. It separates the operator from the bouncing and jostling the mower encounters, even on the roughest terrain. You'll feel like you're floating but you'll still be in total control.





Specifications subject to change without notice. Images for illustrative purposes only

PRO-TURN 652

Kawasaki® FX850 V-Twin Engine / 27 HP 24.1 km/h forwards / 9.6 km/h backwards 47.9 L Fuel Capacity / 696.2 KG

PRO-TURN 660

Kawasaki® FX1000 V-Twin Engine / 35 HP 24.1 km/h forwards / 9.6 km/h backwards 47.9 L Fuel Capacity / 719.3 KG

SKU: AGU992501

SKU: AGU992500

PRO-TURN 660 EFI

Kawasaki® FX1000 EFI V-Twin Engine / 38.5 HP 24.1 km/h forwards / 9.6 km/h backwards 47.9 L Fuel Capacity / 726.2 KG

PRO-TURN 672

SKU: AGU992502 Kawasaki® FX1000 V-Twin Engine / 35 HP

24.1 km/h forwards / 9.6 km/h backwards 47.9 L Fuel Capacity / 746.6 KG

PRO-TURN 672 EFI

Kawasaki® FX1000 EFI V-Twin Engine / 38.5 HP 24.1 km/h forwards / 9.6 km/h backwards 47.9 L Fuel Capacity / 753.4 KG





IT HAS QUIETLY SILENCED ANY DOUBT.

Welcome to superior battery technology from FusionCore. The EV's four swappable batteries deliver the all-day, reliable high-performance power you need in a commercial mower. No pullies, belts, engine oil changes, or driving vibrations. They've been replaced with the guiet hum of success.

X3 CONSTANT DRIVE SPINDLES - Our proprietary spindles have a blade slip feature that prevents damage in the event of an impact. They also have a bottom bearing for easy serviceability and routine maintenance which avoids the need to replace the entire spindle.

NEXT-GEN WHEEL DRIVES - Transaxles are driven with a brushless electric-drive motor coupled with a dual-reduction planetary gearbox.

LCD DISPLAY - High-tech display screen keeps the operator in the know with information on battery charge, blade engagement, and alerts if an issue needs to be addressed.

X-FACTOR® 3 DECK - The deck has been completely redesigned for better grass dispersion. Its new look is constructed from 7-gauge steel to deliver years of solid performance.



Specifications subject to change without notice. Images for illustrative purposes only

PRO-TURN EV 48"

16 kWh Li-ion Battery Power 17.7 km/h forwards / 8.8 km/h backwards / 572 KG

PRO-TURN EV 52"

16 kWh Li-ion Battery Power 17.7 km/h forwards / 8.8 km/h backwards / 582.4 KG

PRO-TURN EV 60"

16 kWh Li-ion Battery Power 17.7 km/h forwards / 8.8 km/h backwards / 595.1 KG

PRO-TURN EV 48" RD

16 kWh Li-ion Battery Power 17.7 km/h forwards / 8.8 km/h backwards / 583.3 KG

PRO-TURN EV 52" RD

16 kWh Li-ion Battery Power 17.7 km/h forwards / 8.8 km/h backwards / 590.1 KG

PRO-TURN EV 60" RD

16 kWh Li-ion Battery Power 17.7 km/h forwards / 8.8 km/h backwards / 601.4 KG



34 gravely.com.au

STEP UP TO GREATNESS.

The perfect blend of power and performance for environments that demand quick on-and-off versatility. The deck adjusts easily, and the suspension platform absorbs vibration for all-day comfort.

DECK HEIGHT ADJUSTMENT - The dual height-adjustment system was designed with both a traditional hand lever and a foot lever to lift and adjust the deck. It's perfect for smaller operators who may struggle with traditional hand lever lifts.

TRANSMISSION - The ZT-3400 integrated transmission boasts an industry-leading 1.125-inch axle for heavy loads (32" and 36" model uses ZT-3100).

X-FACTOR® 3 DECK - The deck has been completely redesigned for better grass dispersion. Its new look is constructed from 7-gauge steel to deliver years of solid performance.









Specifications subject to change without notice. Images for illustrative purposes only.

PRO-STANCE 32"

Kawasaki® FS600 V-Twin Engine / 18.5 HP 12.8 km/h forwards / 4.8 km/h backwards 22.6 L Fuel Capacity / 340.1 KG

SKU: AGU994157

PRO-STANCE 36"

Kawasaki® FS600 V-Twin Engine / 18.5 HP 12.8 km/h forwards / 4.8 km/h backwards 22.6 L Fuel Capacity / 355.6 KG

SKU: AGU994149

PRO-STANCE 48"

Kawasaki® FX730 V-Twin Engine / 23.5 HP 14.4 km/h forwards / 6.4 km/h backwards 33.9 L Fuel Capacity / 451.3 KG

SKU: AGU994161

PRO-STANCE 52"

Kawasaki® FX730 V-Twin Engine / 23.5 HP 14.4 km/h forwards / 6.4 km/h backwards 33.9 L Fuel Capacity / 460.4 KG

SKU: AGU994162

PRO-STANCE 52" EFI

Kawasaki® FT730 EFI V-Twin Engine / 26 HP 14.4 km/h forwards / 6.4 km/h backwards 33.9 L Fuel Capacity / 460.4 KG

SKU: AGU994163

PRO-STANCE 60"

Kawasaki® FX730 V-Twin Engine / 23.5 HP 14.4 km/h forwards / 6.4 km/h backwards 33.9 L Fuel Capacity / 473 KG

SKU: AGU994164

PRO-STANCE 60" EFI

Kawasaki® FT730 EFI V-Twin Engine / 26 HP 14.4 km/h forwards / 6.4 km/h backwards 33.9 L Fuel Capacity / 475.3 KG

SKU: AGU994165

gravely.com.au 35

IT'S ALL ABOUT ACCESSORISING

The best of the best, just got better.

These additional tools and accessories have been meticulously engineered and come straight from the factory to fit seamlessly with your machine. They can help shave time off your schedule or help lighten the load. Looks like you can improve on perfection.





Separate cutting chambers for each blade produce smaller clippings for a professionally manicured appearance.

MULCH KIT



LIGHT KIT

Light up the way with the LED headlight kit. Allowing you to keep on cutting long after others call it a day.



BEACON LIGHT KIT _

Ideal for municipal jobs and high traffic areas, the increased visibility of Gravely unit by adding a foldable ROPS the ROPS mounted beacon light kit puts the safety of you and your unit first.



FOLDING ROPS KIT

Add an extra level of safety to your kit to your unit.

Note: not available for all units.



3-BIN BAGGER

No mess, no problems. With a range of grass collection bags to suit certain models throughout the range. This will make the clean up job easy.



SUNSHADE KIT

Stay sun safe and cool with our hardtop sunshade. This kit features a strong steel bracket system and a UV-resistant canopy that folds easily for transport and storage.



CASTER SUSPENSION FORK KIT

Smooth the ride on bumpy terrain with the OEM suspension forks. They're specially designed to deliver more comfort and control when your mower is on the job.



HITCH KIT

Add a hitch kit to enjoy unmatched versatility with a variety of tow-behind options.



SEMI-PNEUMATIC TYRES ___

Keep rolling on with the job, literally! Our semi-pneumatic caster wheels are constructed with a thick, puncture resistant rubber to cushion bumps and protect your unit.



ZERO-TURN COVER

Protect your pride and joy from all the elements Australia can throw your way with the durable Gravely zero turn cover.



FUSIONCORE OFF BOARD PORTABLE CHARGER

Charge your extra Gravely Pro-Turn EV batteries off-vehicle ensuring you've got the power to perform wherever the job takes you.



SINGLE REPLACEMENT BATTERY _

Turn downtime into go-time with the Gravely FusionCore, QuickSwap replacement batteries for your Pro-Turn EV.

	COMPACT PRO PRO-TURN ZX			X	PI	RO-TURN 1	00		
	34	44	48	52	60	148	152	160	
MODEL NUMBER	AGU991144	AGU991145	AGU991286	AGU991288	AGU991290	AGU991128	AGU991129	AGU991130	
ENGINE	Kawasaki® FX481V	Kawasaki® FX600V	Kawasaki® FX691V	Kawasaki® FX691V	Kawasaki® FX730V	Kawasaki® FX691V	Kawasaki® FX691V	Kawasaki® FX730V	
HORSEPOWER / DISPLACEMENT	15.5 HP / 603 CC	19 HP / 603 CC	22 HP / 726 CC	22 HP / 726 CC	23.5 HP / 726 CC	22 HP / 726 CC	22 HP / 726 CC	23.5 HP / 726 CC	
DRIVE SYSTEM	Hydro-Gear® ZT-3100 Transaxle		Hydro-Gear® ZT-3200 Transaxles			Hyd	ro-Gear® ZT-3400 Transa	axles	
FUEL CAPACITY	27.	27.1 L 18.8 L 37.7 L							
GROUND SPEED (APPROX. K/PH - Forward / Reverse)	11.2 KM/H 4.8 KM/H E		13.6 KM/H Forwards 6.4 KM/H Backwards			16 KM/H Forwards 8 KM/H Backwards			
DECK									
DECK MATERIAL		10 GA. Stee	l W/ 10 GA. Spindle Rein	forcement		7 GA. Steel W/ 1/4 Inch Spindle Reinforcement			
DECK CONSTRUCTION	Fabri	cated		Fabricated X-Factor® 3		Fabricated X-Factor® II			
NUMBER OF SPINDLES	2	3				3			
BLADE TIP SPEED (FPM)	17,270) FPM			18,0	.000 FPM			
SPINDLE HOUSING MATERIAL				Forged A	uminum				
SPINDLE BEARINGS	Sealed Bearing								
DECK ENGAGEMENT	Ogura® GT1.5 B	Electric Clutch	Og	ura® GT 1.5 Electric Clut	ch	Og	jura® GT 2.75 Electric Clu	tch	
DECK LIFT SYSTEM				Foot 0	perated				
CUTTING WIDTH	34 Inch	44 Inch	48 Inch	52 Inch	60 Inch	48 Inch	52 Inch	60 Inch	
CUTTING POSITIONS / HEIGHT	17 Cutting Positions	(25.1 MM - 127 MM)	15 Cuttir	ng Positions (38.1 MM x	127 MM)	17 Cutt	ing Positions (25.4 MM x	127 MM)	
WHEELS									
FRONT	13 x 5 x 6	Smooth		13 x 6.50 - 6 Smooth			13 x 6.50 - 6 Smooth		
REAR	21 x 7 - 10 Turf	20.5 x 8 - 10 Turf	22 x 10 - 12 Turf	22 x 10.5 - 12 Turf	22 x 12 - 12 Turf		23 x 10.50 - 12 Turf		
FEATURES									
SEAT	High Back W/ E	vc Suspension	High Back Com	fort W/ Suspension & Pa	dded Armrests	High Back W/ Full Suspension And Molded Arm Rests			
FOLDABLE ROPS	Optio	onal			Sta	ndard			
MACHINE									
WEIGHT	334.2 KG	357.8 KG	419.5 KG	422.2 KG	431.8 KG	481.7 KG	489.4 KG	508.4 KG	
LENGTH	1905	ММ		2006.6 MM			1993.9 MM		
WIDTH (w/ Chute Up w/ Chute Down)	911.8 MM 1226.8 MM	1186.1 MM 1445.2 MM	1290.3 MM 1572.2 MM	1427.4 MM 1709.4 MM	1617.9 MM 1899.9 MM	1270 MM 1574 MM	1409.7 MM 1714 MM	1600.2 MM 1905 MM	
HEIGHT (w/ ROPS Up w/ ROPS Down)	1150.	6 MM		1828.8 MM / 1320.8 MM			1727.2 MM / 1219.2 MM		
WARRANTY									
UNIT	4 Year / 7	750 Hour		4 Year / 750 Hour		5 Y	ear / 1000 Hour Comme	cial	

PRO-TURN MACH ONE

PRO-TURN 600

		1 KG 1 GKK GGG							
	60	652	660	660 EFI	672	672 EFI			
MODEL NUMBER	AGU992297	AGU992500	AGU992501	AGU992503	AGU992502	AGU992504			
ENGINE	Kawasaki® FX921V	Kawasaki® FX850V	Kawasaki® FX1000	Kawasaki® FX1000 EFI	Kawasaki® FX1000	Kawasaki® FX1000 EF			
HORSEPOWER / DISPLACEMENT	31 HP / 999 CC	27 HP / 852 CC	35 HP / 999 CC	38.5 HP / 999 CC	35 HP / 999 CC	38.5 HP / 999 CC			
DRIVE SYSTEM	Hydro-Gear® ZT-5400 Transaxles			Parker HTG Transmission					
FUEL CAPACITY	50.6 L 47.9 L								
GROUND SPEED (APPROX. K/PH - Forward / Reverse)	20.9 KM/H Forwards 9.6 KM/H Backwards	24.1 KM/H Forwards 9.6 KM/H Backwards							
DECK									
DECK MATERIAL	7 GA. Steel W/ 1/4 Inch Spindle Reinforcement 7 GA. Steel W/ 1/4 Inch Spindle Reinforcement								
DECK CONSTRUCTION	Welded	Welded Fabricated X-Factor® 3							
NUMBER OF SPINDLES	3			3					
BLADE TIP SPEED (FPM)	18,633 FPM			18,000 FPM					
SPINDLE HOUSING MATERIAL			Forged Aluminum						
SPINDLE BEARINGS		Sealed Bearing							
DECK ENGAGEMENT		Ogu	ura® GT 3.5 Electric Clutch						
DECK LIFT SYSTEM			Foot Operated						
CUTTING WIDTH	60 Inch	52 Inch 60 Inch 60 Inch 72 Inch							
CUTTING POSITIONS / HEIGHT	19 Cutting Positions (38.1 MM - 139.7 MM)		19 Cut	ting Positions (25.4 MM - 139	9.7 MM)				
WHEELS									
FRONT	15 x 6-6 Smooth W/ Greasable Tapered Roller Bearings		15	x 6 - 6 Smooth Semi Pneum	atic				
REAR	24 x 12 - 12 Turf		26	x 12 - 16 Low Profile Radial	Turf				
FEATURES									
SEAT	High Back Comfort W/ Full Suspension Seat And Padded Arm Rests		High Back	Bolstered W/ Suspension P	od System				
FOLDABLE ROPS			Standard						
MACHINE									
WEIGHT	624.6 KG	696.2 KG	719.3 KG	726.2 KG	746.6 KG	753.4 KG			
LENGTH	2032 MM			2108.2 MM					
WIDTH (w/ Chute Up w/ Chute Down)	1549.4 MM 1894.8 MM	1397 MM 1600.2 MM 1905 MM 1905 MM 2209.8 MM							
HEIGHT (w/ ROPS Up w/ ROPS Down)	1778 MM / 1212.8 MM			1816.1 MM / 1214.1 MM					
WARRANTY									
UNIT	5 Year / 1250 Hour Commercial	5 Year / 1500 Hour Commercial							

_	DNI EV
	KINEV

	PRO-TURN EV									
	48	48 RD	52	52 RD	60	60 RD				
MODEL NUMBER	AGU997005	AGU997008	AGU997006	AGU997009	AGU997007	AGU997010				
ENGINE			4 x 16 KWH Fusion	n Core Lithium Ion						
HORSEPOWER / DISPLACEMENT	5 KW Wheel Drive Motor / 3.5 kw Per Spindle Motor									
DRIVE SYSTEM		Proprietary Electric Transaxles								
FUEL CAPACITY		N / A								
GROUND SPEED (APPROX. K/PH - Forward / Reverse)		12.8 KM/H Forwards / 6.4 KM/H Backwards (Low Speed) 17.7 KM/H Forwards / 8.8 KM/H Backwards (High Speed)								
DECK										
DECK MATERIAL	7 GA.									
DECK CONSTRUCTION		Fabricated X-Factor® 3 Deck								
NUMBER OF SPINDLES		3								
BLADE TIP SPEED (FPM)	18,000 FPM									
SPINDLE HOUSING MATERIAL	Cast Aluminum									
SPINDLE BEARINGS		Serviceable Bottom Bearing								
DECK ENGAGEMENT			Electric DC Bru	ishless Motors						
DECK LIFT SYSTEM										
CUTTING WIDTH	48 Inch	48 Inch Rear Discharge	52 Inch	52 Inch Rear Discharge	60 Inch	60 Inch Rear Discharge				
CUTTING POSITIONS / HEIGHT			15 Cutting Positions	(38.1 MM - 127 MM)						
WHEELS										
FRONT		13 x 6.5 - 6 Smooth								
REAR	22 x 10	- 12 Turf	22 x 10.5	- 12 Turf	22 x 12	- 12 Turf				
FEATURES										
SEAT			High Back Comfo	rt W/ Suspension						
FOLDABLE ROPS			Stan	dard						
MACHINE										
WEIGHT	572 KG	583.3 KG	582.4 KG	590.1 KG	595.1 KG	601.4 KG				
LENGTH			2108.	2 MM						
WIDTH (w/ Chute Up w/ Chute Down)	1270 MM 1574.8 MM	1270 MM 1270 MM	1422.4 MM 1701.8 MM	1371.6 MM 1371.6MM	1600.2 MM 1905 MM	1574.8 MM 1574.8 MM				
HEIGHT (w/ ROPS Up w/ ROPS Down)			1828.2 MM /	1244.6 MM						
WARRANTY										
UNIT			5 Year / 1500 Hour Commerc	ial / 3 Year Battery Warranty						

PRO-STANCE

				I NO-SIANCE	-				
	32	36	48	52	52 EFI	60	60 EFI		
MODEL NUMBER	AGU994157	AGU994149	AGU994161	AGU994162	AGU994163	AGU994164	AGU994165		
ENGINE	Kawasaki® FS600V	Kawasaki® FS600V	Kawasaki® FX730V	Kawasaki® FX730V	Kawasaki® FT730 EFI	Kawasaki® FX730V	Kawasaki® FT730V-EFI		
HORSEPOWER / DISPLACEMENT	18.5 HP / 603 CC	18.5 HP / 603 CC	23.5 HP / 726 CC	23.5 HP / 726 CC	26 HP / 726 CC	23.5 HP / 726 CC	26 HP / 726 CC		
DRIVE SYSTEM	Hydro-Gear® ZT-	-3100 Transaxles		Hy	/dro-Gear® ZT-3400 Transax	les			
FUEL CAPACITY	22	22.6 L 33.9 L							
GROUND SPEED (APPROX. K/PH - Forward / Reverse)		l Forwards Backwards			14.4 KM/H Forwards 6.4 KM/H Backwards				
DECK									
DECK MATERIAL				7 GA.					
DECK CONSTRUCTION		Fabricated X-Factor® 3 Deck							
NUMBER OF SPINDLES	:	2	3						
BLADE TIP SPEED (FPM)	18,22	0 FPM	18,000 FPM						
SPINDLE HOUSING MATERIAL		Forged Aluminum							
SPINDLE BEARINGS	Sealed Bearing								
DECK ENGAGEMENT	Ogura® 2.75 Electric Clutch								
DECK LIFT SYSTEM			Oval	- Traditional Hand And Foot	Lever				
CUTTING WIDTH	32 Inch	36 Inch	48 Inch	52 Inch	52 Inch	60 Inch	60 Inch		
CUTTING POSITIONS / HEIGHT			15 Cu	tting Positions / 38.1 MM - 1	27 MM				
WHEELS									
FRONT	11 x 4.00 - 5 S	emi-Pneumatic			13 x 6.50 - 6 Semi-Pneumati	c			
REAR	18 x 6.50 - 8 Radial	18 x 8.50 - 8 Radial			20 x 10.50 - 8 Radial				
FEATURES									
SEAT				N / A					
FOLDABLE ROPS				N / A					
MACHINE									
WEIGHT	340.1 KG	355.6 KG	451.3 KG	460.4 KG	460.4 KG	473 KG	475.3 KG		
LENGTH	1511	.3 MM		1540 MM		1574	.8 MM		
WIDTH (w/ Chute Up w/ Chute Down)	850.9 MM 1244.6 MM	927.1 MM 1244.6 MM	1270 MM 1581.1 MM		.7 MM .8 MM		.2 MM .3 MM		
HEIGHT (w/ ROPS Up w/ ROPS Down)				1219.2 MM					
WARRANTY									
UNIT	5 Year / 1000 Hour Commercial								
		The first four four sommercial							





gravely.com.au