


SEWAGE TREATMENT

TAYLEX ABS (Advanced Blower System) Advanced Secondary System

ST1

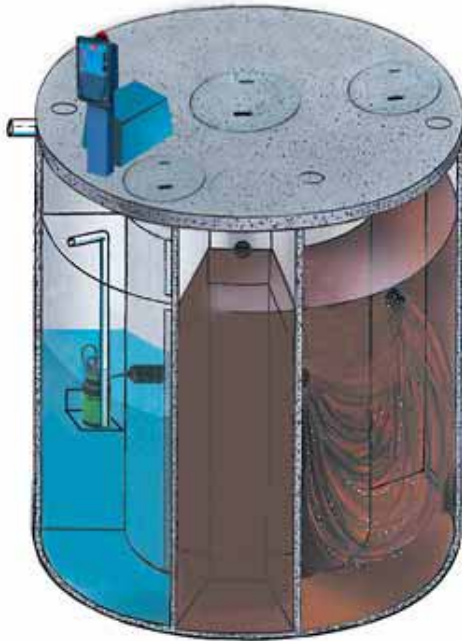

Taylex ABS 10 Person
2000 L per day
with Standard 25D Pump

Height	2300mm
Invert	1830 or 1530mm
Diameter	2450mm
Weight	6.25ton


ABS with Davey **ST2**
D42 Pump

ABS with Davey **ST3**
D25 Pump & UltraViolet
Light (Qld Only)

ABS with Davey **ST4**
D42 Pump & UltraViolet
Light (Qld Only)

TAYLEX ABS (Advanced Blower System) 1170mm Invert 1 Piece Riser ABS with D25 Pump

ST5

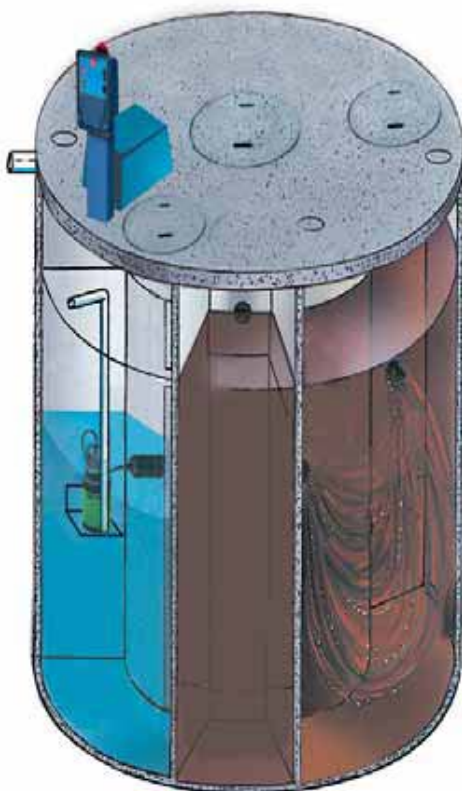

Taylex ABS 10 Person
2000 L per day
with Standard 25D Pump

Height	2700mm
Invert	1170mm
Diameter	2450mm
Weight	6.7ton

1170mm Invert **ST6**
1 Piece Riser ABS
with D42 Pump


1170mm Invert **ST7**
1 Piece Riser ABS
with D25 Pump &
UltraViolet Light
(Qld Only)

1170mm Invert **ST8**
1 Piece Riser ABS
with D42 Pump &
UltraViolet
Light (Qld Only)

SEWAGE TREATMENT

TAYLEX DMS (Domestic Membrane System) **ST9**

Advanced Secondary with Nutrient Removal

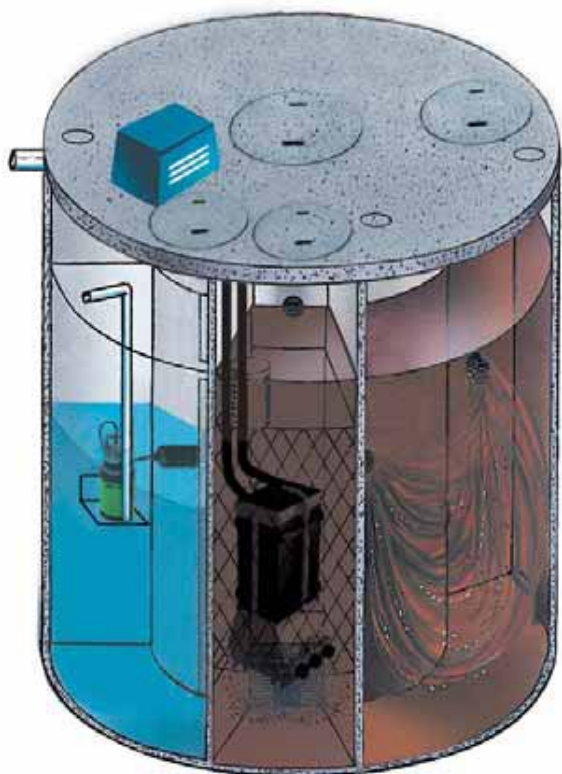

Taylex DMS
10 Person 2000 L per day
with Standard 25D Pump

Height	2300mm
Invert	1830 or 1530mm
Diameter	2450mm
Weight	6.25ton

DMS with Davey **ST10**
D42 Pump

1170mm Invert **ST11**
1 Piece Riser DMS
with D25 Pump

1170mm Invert **ST12**
1 Piece Riser DMS
with D42 Pump

SEWAGE TREATMENT

Poly ABS

ST13

Poly ABS with
Davey D42 Pump

ST14

Poly ABS with Davey
D25 Pump & UltraViolet
Light (Qld Only)

ST15


Poly ABS with Davey
D42 Pump & UltraViolet
Light (Qld Only)

ST16



TAYLEX DELUXE

ST17

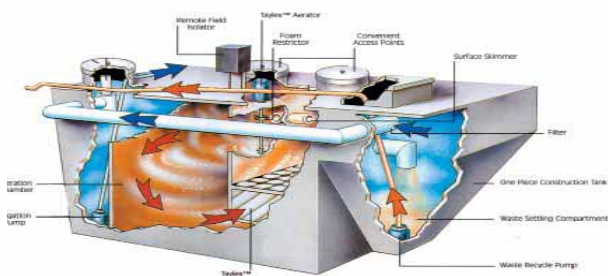


Taylex Deluxe
No Septic

Height	2100mm
Invert	1400mm
Diameter	1700mm
Weight	5.3ton
Length	3200mm

TAYLEX DELUXE with SEPTIC

ST18

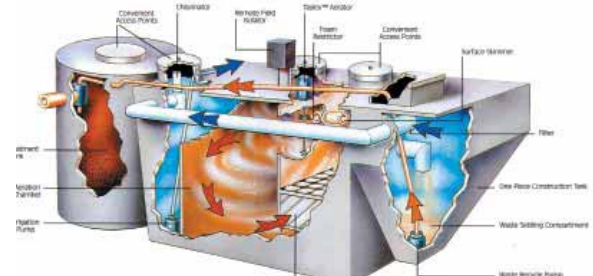


Deluxe with 4000L
Septic 3000L per day

SEWAGE TREATMENT

TAYLEX COMMERCIAL 90

ST19

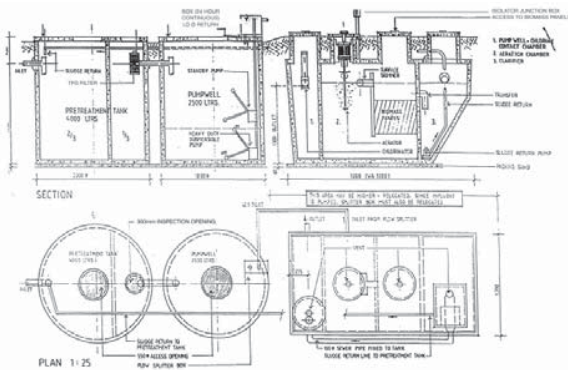


Taylex 90
Commercial with
10,000L b/w Septic
10,000L flow
balance tank and
Deluxe.
3,000L per day

Refer to
individual
drawings on
each tank

TAYLEX COMMERCIAL 100

ST20

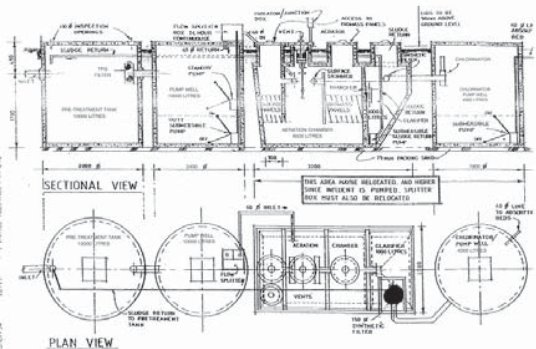

Taylex 100
Commercial with
10,000L b/w Septic
10,000L flow balance
tank, and modified
Deluxe tank and
4,000L pump well.
4,500L per day

Refer to individual
drawings on each
tank

TAYLEX MAXI TANK

ST21



Taylex Maxi
tank with
G.P.O. high
level alarm
post. Light.
Irrigation
pump. TFG
filter.

Height
2300mm
Invert
1830mm
Diameter
2450mm
Weight
6.25ton

TAYLEX MAXI TANK - POLY

ST22



Taylex Maxi tank with
G.P.O. high level alarm
post. Light. Irrigation
pump. TFG filter.

Taylex MAXI Tank Dual ALternating Pumps


ST23



Height
2300mm
Invert
1830mm
Diameter
2450mm
Weight
6.25ton

Taylex ABS 4,000Lt per Day

ST24

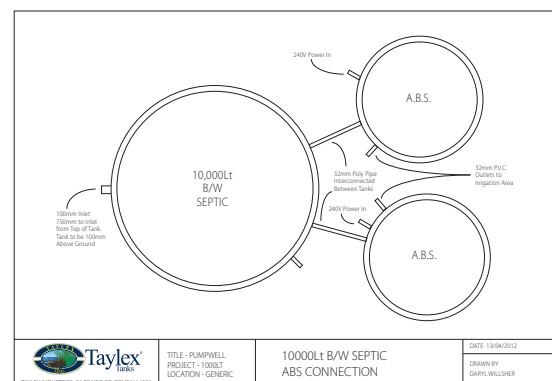


Taylex
Tanks

TITLE - PUMPWELL
PROJECT - 1000LT
LOCATION - GENERIC

10000LT B/W SEPTIC
ABS CONNECTION


DATE 13/04/2012
DRAWN BY
GARY WILSON

SEWAGE TREATMENT

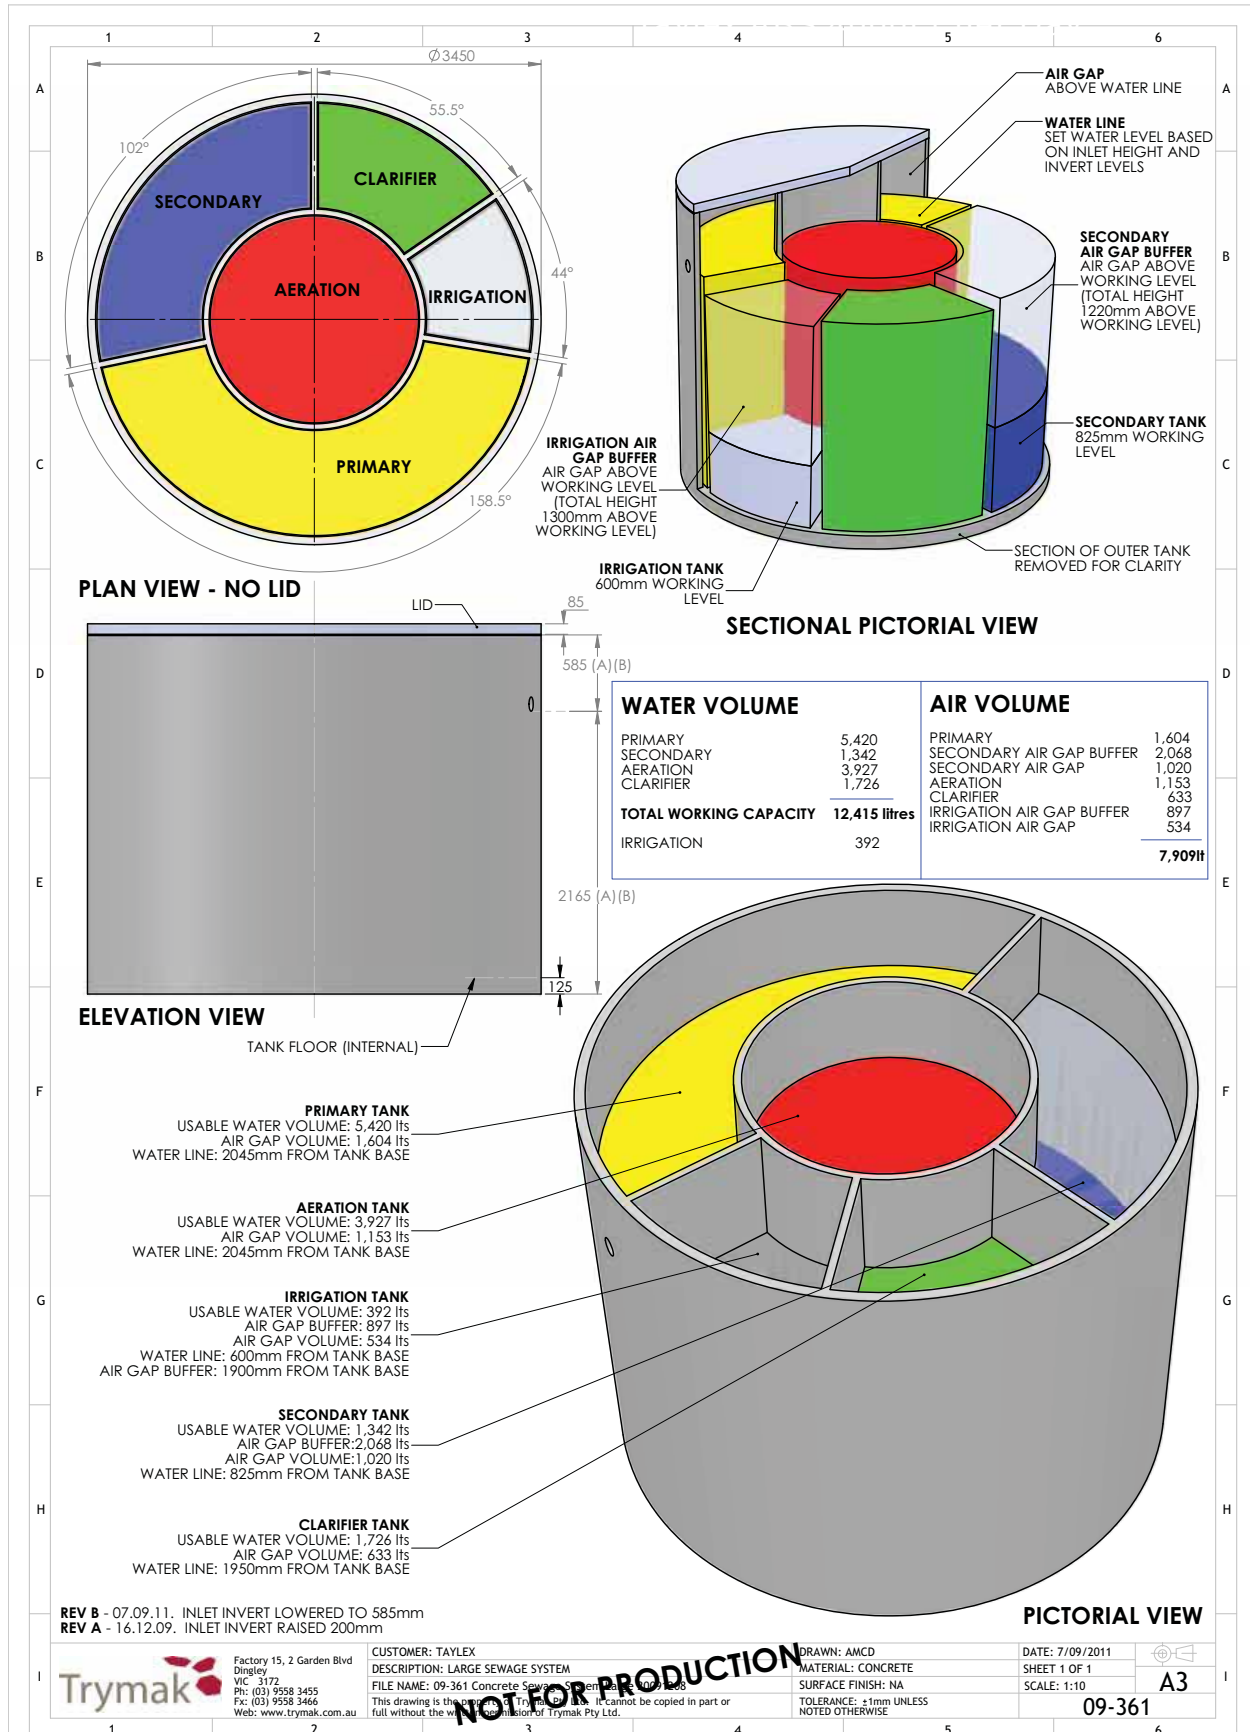CABS 5,000 Litres per Day
ST25


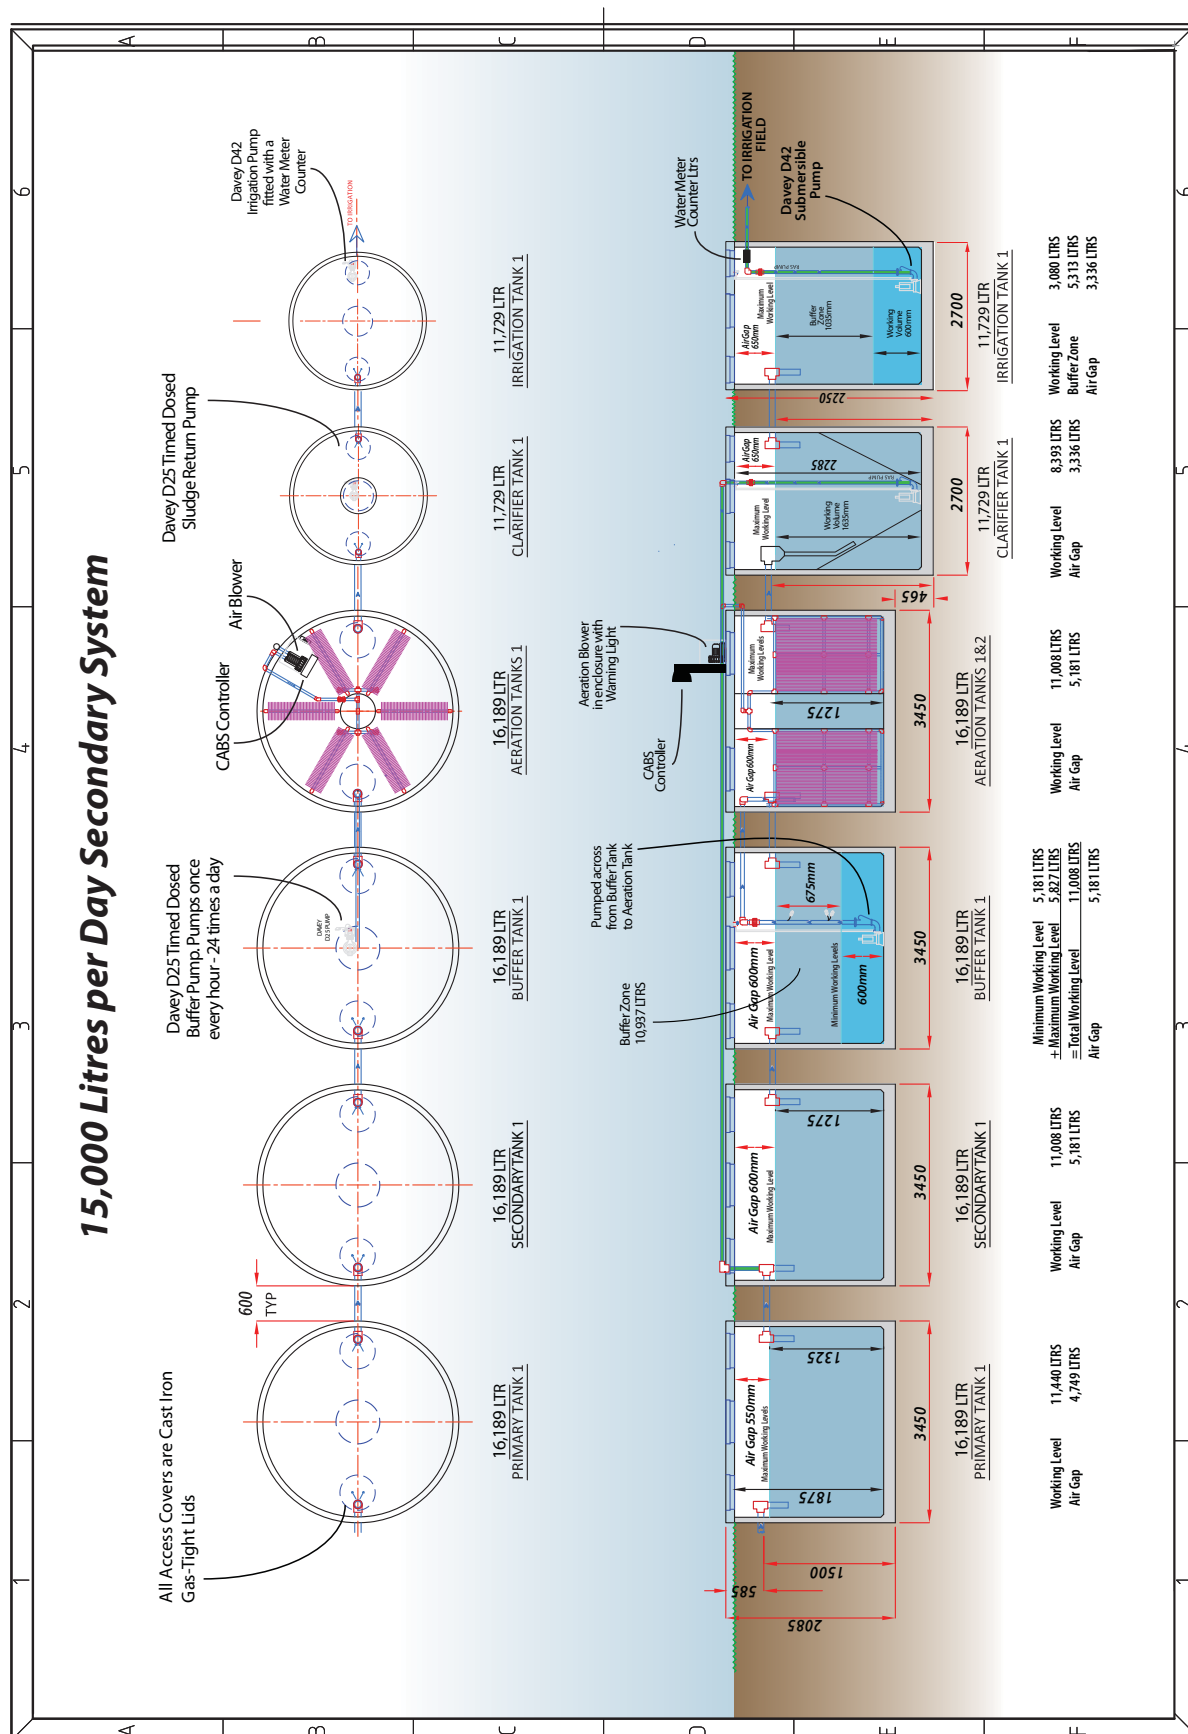
CABS 10,000 Litres per Day

10,000 Litres per Day Secondary System

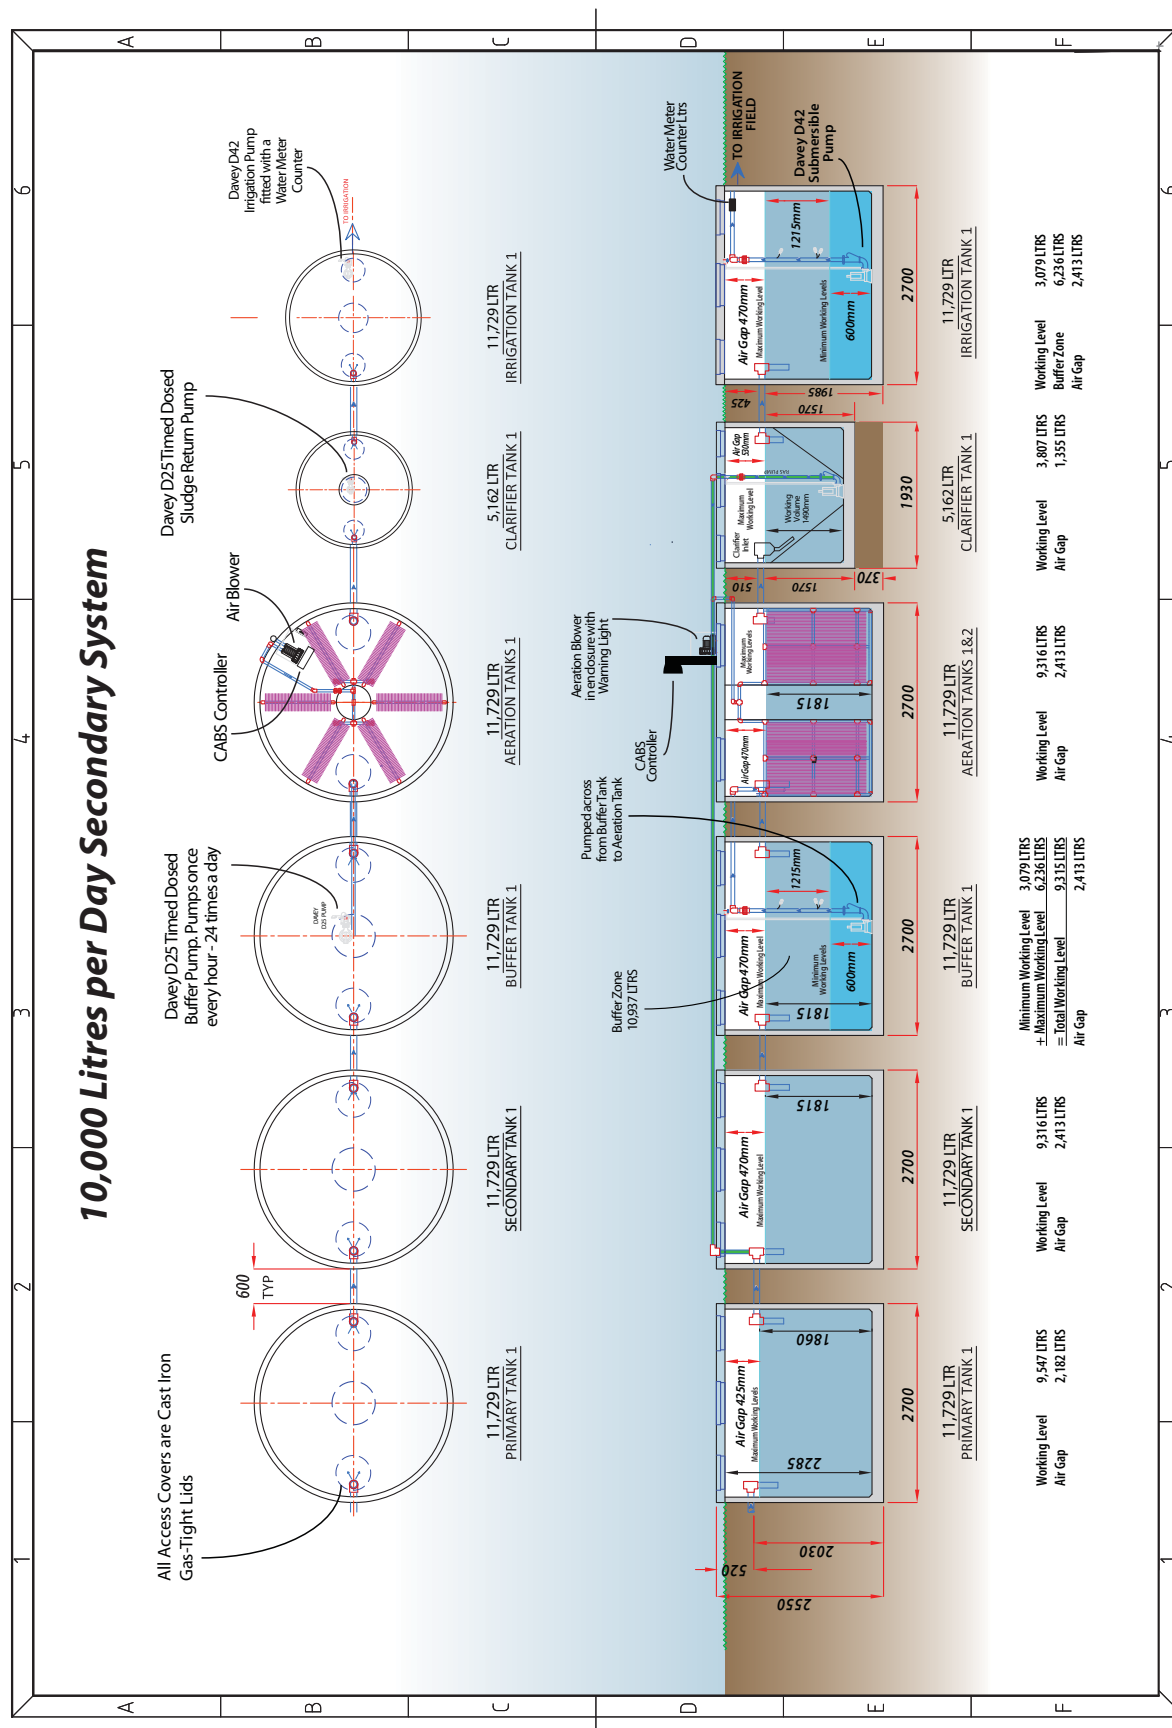


CABS 15,000 Litres per Day

15,000 Litres per Day Secondary System



CABS 20,000 Lt per Day

ST28

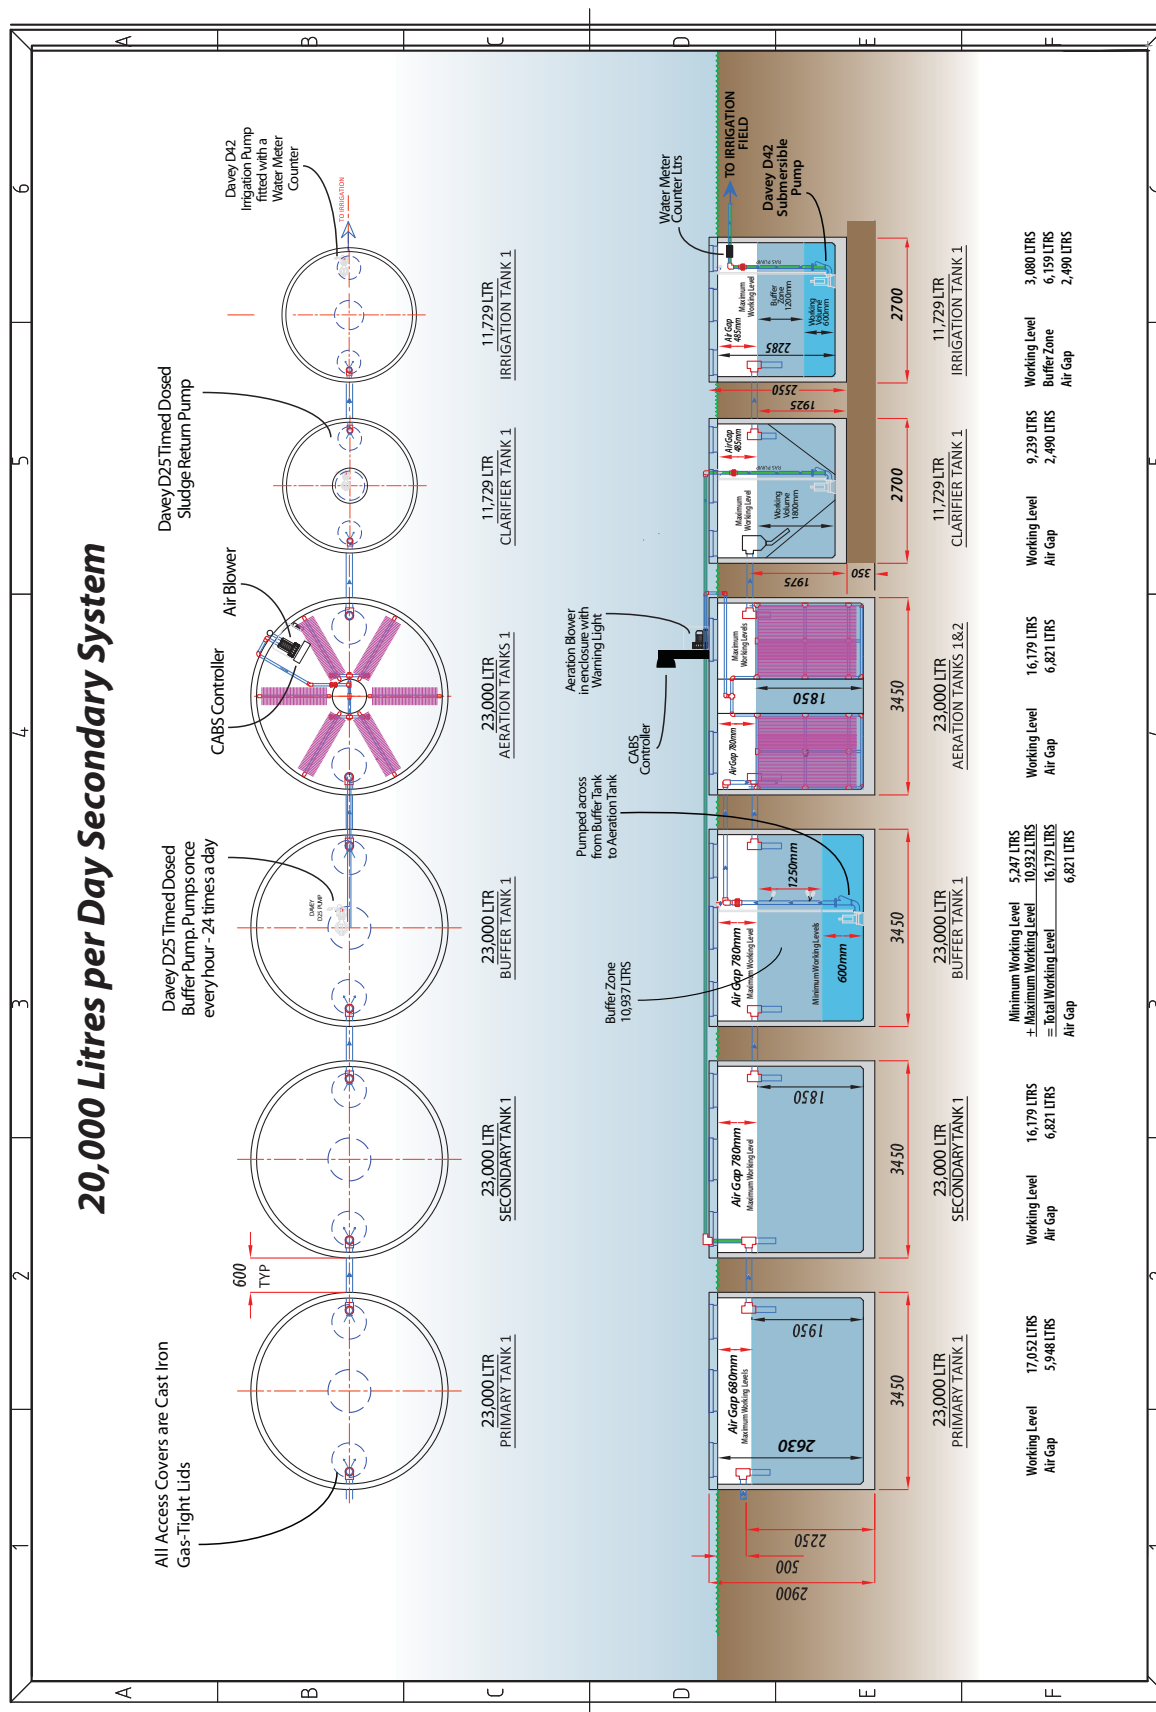

SEWAGE TREATMENT

10,000 Lt Dual Alternating Pump Station to Mine Specification

ST29

