



Famigluti Pty Ltd t/as

ABN 65 178 019 627 | ACN 009 965 217

Redcliffe Skylights & Norm Hogg Sheetmetals

📍 74 High Street, Kippa-Ring Qld 4021
✉ sales@redcliffeskylights.com.au

☎ 07 3284 1300 / 1800 017 226
🌐 www.redcliffeskylights.com.au

BAL <29 SKYLIGHTS

Fully flashed unit ready to install



Series 4

** sample photo only. BAL skylight will have glass top**



Vented Series 1

Bring natural light into your home
or business with a skylight!

A Wholly Owned Queensland Company



BAL LEVEL SKYLIGHTS <29

Redcliffe Skylights offer a BAL glass variant of the standard domed skylights to comply with Bush Fire Attack Levels as high as 29 (level 3). All of our BAL skylights have only one roof penetration. This saves on installation costs and delivers a far smoother roof line. Our BAL skylights have been developed with the utmost care and precision to comply with all relevant BAL requirements.

Advantages

- Installation made easy
- Robust design
- Weatherproof
- Guaranteed ventilation and light to areas like kitchens, toilets, bathrooms and laundries etc.
- Low silhouette
- No extras, complete unit supplied
- Replacement parts also available
- Options for either ventilated (passive or mechanically) or non-ventilated.

| CIRCULAR | APPROX. OPENING | LIGHT AREA M ² | NATURAL | SUPERVENT | MECHANICAL |
|--------------|-----------------|---------------------------|---------|-----------|------------|
| 300 Series 1 | 300DIA | .070 | .030 | .097 | N/A |
| 400 Series 1 | 400DIA | .125 | .070 | .123 | N/A |
| 400 Series 4 | 400DIA | .125 | N/A | N/A | 245 |
| 500 Series 1 | 500DIA | .196 | .077 | N/A | N/A |
| 500 Series 4 | 500DIA | .196 | N/A | N/A | 245 |

Custom made sizes are available at request. Skylights manufactured by this company have been manufactured as per Australian Standard AS 4285 & AS 1288.

Redcliffe Skylights reserve the right to improve or modify these products at any time. It is the user's responsibility to ensure that the installation of these skylight products meet the requirements of Local and State Authorities.

Bases

All standard skylight bases are manufactured from 0.8mm Zinalume or galvanised iron. If required, units can be manufactured in stainless steel or aluminium. Bases can also be painted or powder-coated to suit most roof colours. Ventilated BAL models come with stainless steel woven wire mesh with maximum aperture of 2mm.

Glass Types

BAL rated skylights come standard with a square flat 6.38mm Grade A Clear Laminated Safety Glass. We also have options such as tinted, 10.38mm, double glazed and more, subject to availability.

Diffuser Types



The standard Y15 prismatic diffuser is ideal for dispersing light more evenly with a 82% light output ratio. There are other options available at request to better suit your style, such as Y12 prismatic, Lite Opal, Seadrift and Eggcrate. There is also a flush ceiling trim option.

Maintenance

You can clean your skylight with just sudsy water and a soft cloth, please take care when cleaning skylight glass and use minimal pressure. We also recommends regularly clearing of any foliage or rubbish on and around the base of your skylights.

Circular skylight shaft kit

Standard shaft kit comes with 1x 2m length of duct, 1x set of screws, 1x ceiling trim and Y15 prismatic diffuser.

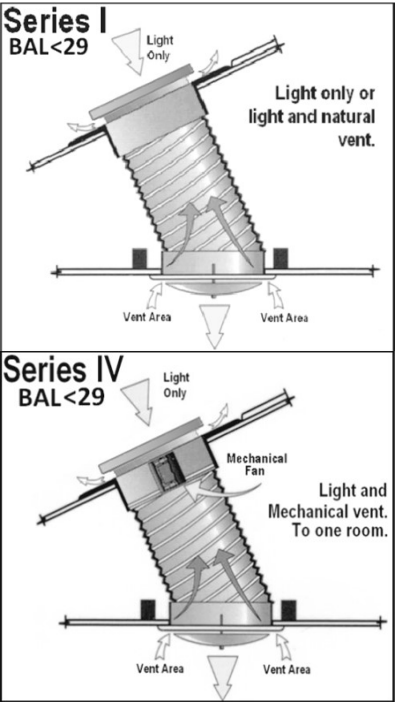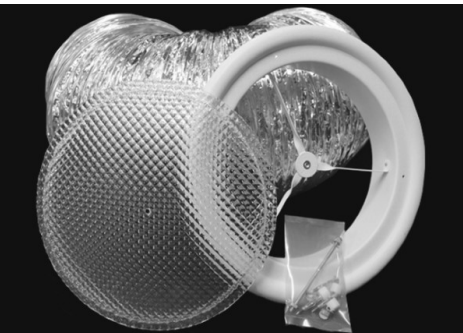

BAL Circular Series 1 300, 400, 500

This unit is the passively vented to allow for natural air flow, or non-ventilated model where only light is required. The ideal application for many rooms such as living areas, hallways, bathrooms, garages etc.

BAL Circular Series 4 400, 500

This model is similar to the series 1 but instead of being passively ventilated, there is an in-line fan mounted into the upstand. This model may obstruct the light which is why we only offer it in the two larger sizes. An electrician may be required to connect the fan to a power outlet.

NOTES

