# Deadbolts





We take the worry out of protecting what's valuable to you. Lockwood: no worries®





### **Contents**









### Paradigm®

005 Double Cylinder Deadbolt

page 3

### Paradigm<sup>®</sup>

005 Latching

page 7

### Paradigm<sup>®</sup>

Pull Handle Lockset Deadbolt

page 10

### Paradigm<sup>®</sup>

Pull Handle Lockset Deadlatch

page 12



### Paradigm<sup>®</sup>

Pull Handle Lockset **Dummy Handle** 

page 14





Deadbolt Single Cylinder

page 17

**Symmetry**®



### Symmetry®

Double Cylinder

page 19

# Paradigm® 005 Double Cylinder Deadbolt





The Paradigm® 005 Double Cylinder Deadbolt is the premium security solution with its innovative safety features. The contemporary styling can be combined with any lever or entrance handle to create an elegant security solution, ideal for residential and architectural applications.

### **Key Features**

- Three function modes with DualSelect® provides combination of convenience and security
- High security cut resistant stainless steel bolt
- Safety Release™ automatically unlocks internal knob upon key entry from outside
- LockAlert® indicator shows lock status at a glance
- Available in round or square rose


### **Restricted Special Keying**

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.

Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

### Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 32-48mm door thickness.



Product Details				
Backset	60 to 70mm adjustable stainless steel bolt			
Bolt	High security, cut resistant stainless steel bolt			
Cylinder	5 pin tumbler mechanism. Brass cylinder and brass barrel			
Door Thickness	32–48mm 32–36mm doors require a spacer (Included)			
Finishes	Chrome Plate (CP) Satin Chrome Pearl (SP) Satin Chrome Brushed (SC) Everbrass (EVB) Satin Stainless Steel (SSS)*			
Keying	Supplied individually keyed with two keys per lock, 78,000 key combinations, Key blank KB401B5P			
Materials	High purity zinc alloy. Stainless steel version features 304 grade satin stainless steel rose, turn knob and trim			
Strike	Box strike with concealed crossgrain door frame strengthening screw			

<sup>\*</sup>Satin Stainless Steel version only available in round rose.


Standards and Compliance				
SL8	(Security) Australian Lock Standard (AS4145.2 - 2008)			
D8	(Durability) Australian Lock Standard (AS4145.2 - 2008)			
<b>C6</b>	(Corrosion) Australian Lock Standard AS4145.2 - 2008)			
K5	(Key Security) Australian Lock Standard AS4145.2 - 2008)			


# Paradigm® 005 Double Cylinder Deadbolt


### **Round Rose**












Exterior

Interior

\*32–36mm door thickness requires spacer ring (included)



### Kinetic Defence®





### Counterbalance Bolt

Proportionally distributes the load between the door and door frame.



### DualSelect®

Turn the key for safety mode. Turn the key further to select secure mode.



### 2 Keys Included

Can be keyed alike to other Lockwood door locks.



### SafetyRelease™

Minimises the risk of being locked in.



### Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 32-48mm door thickness.



#### Anti-Corrosion

Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.



### LockAlert®

Interior Indicator shows lock status at a glance.



### Safety Mode

Securely locked from outside and free from inside.



### Secure Mode

Securely locked from both inside and outside. For when nobody is home.



### Passage Mode


Free to enter from outside and free to exit from inside.


# Paradigm® 005 Double Cylinder Deadbolt

### **Square Rose**











Exterior

Interior

\*32–36mm door thickness requires spacer ring (included)



### Kinetic Defence®

Bump and pick resistant.



### Counterbalance Bolt

Proportionally distributes the load between the door and door frame.



### DualSelect®

Turn the key for safety mode. Turn the key further to select secure mode.



### 2 Keys Included

Can be keyed alike to other Lockwood door locks.



### $SafetyRelease^{\scriptscriptstyle \mathsf{M}}$

Minimises the risk of being locked in.



### Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 32-48mm door thickness.



#### Anti-Corrosion

Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.



### LockAlert®

Interior Indicator shows lock status at a glance.



### Safety Mode

Securely locked from outside and free from inside.



### Secure Mode

Securely locked from both inside and outside. For when nobody is home.



### Passage Mode

Free to enter from outside and free to exit from inside.

### **Ordering Procedure–Lever Sets**

Sample part number 005/B1CPDP is made up of several sections. Choose your product by selecting an option from each section.

### Paradigm® 005 Double Cylinder Deadbolt



	ying
DP	
Packaging	
Universal Pack	DP
Trade Pack	
Keying Options  Special Keying-Resider	ntial
Special Keying-Resider Keyed Alike 5P	ntial 5KA
	6KA
Keyed Alike 6P	
D : . IZ LED	5PK
Project Keyed 5P	
Project Keyed 5P Project Keyed 6P	6PK

# **Latching Paradigm® 005**





The Lockwood Latching Paradigm® 005 is the premium security solution with its innovative safety features. It has a holdback function which keeps the latch in the retracted position when required. The contemporary styling can be combined with any lever or entrance handle to create an elegant security solution, ideal for residential and architectural applications.

### **Key Features**

- Holdback function keeps the latch in the retracted position when required
- High security cut resistant Stainless
   Steel latch
- Concealed screw fixings for a neat and clean appearance
- Safety Release™ function minimises the risk of being deadlatched inside


### **Restricted Special Keying**

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.

Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

### Retrofitable

Replace your existing Deadlatch. Fits 54mm hole. 60mm backset. 32-48mm door thickness




Product Details					
Backset	60 mm stainless steel deadlatch				
Latch	High security, cut resistant stainless steel latch				
Cylinder	5 pin tumbler mechanism Brass cylinder and brass barrel				
Door Thickness	32–48mm 32–36mm doors require a spacer (Included)				
Finishes	Chrome Plate <b>(CP)</b> Satin Chrome Brushed <b>(SC)</b>				
Keying	Supplied individually keyed with two keys per lock, 78,000 key combinations, Key blank KB401B5P				
Materials	High purity zinc alloy				
Strike	Box strike with concealed crossgrain door frame strengthening screw				


# Latching Paradigm® 005


### **Round Rose**











Exterior

Interior

\*32–36mm door thickness requires spacer ring (included)



**Kinetic Defence**<sup>®</sup> Bump and pick resistant.



**Door Thickness** 32mm-48mm



SafetyRelease™ Minimises the risk of being locked in.



**2 Keys Included**Can be keyed alike to other Lockwood door locks.



### Retrofitable

Replace your existing Deadlatch. Fits 54mm hole. 60mm backset. 32-48mm door thickness.



### Holdback Mode

Keep the latch in the retracted position when required.



### Safety Mode

Securely locked from outside and free from inside.




### Secure Mode

Securely locked from both inside and outside. For when nobody is home.

# Latching Paradigm® 005

### **Ordering Procedure**



Packaging Keyi	ing
DP	
Packaging	
Universal Pack	DP
Keying Options	
Special Keying-Resident Keyed Alike 5P	tial 5KA
Keyed Alike 6P	6KA
Project Keyed 5P	5PK
Project Keyed 6P	6PK
Restricted Profile 5P	5RP

<sup>\*</sup> For keying options please contact customer service.



The Australian designed Paradigm® Pull Handle Lockset expresses superior state-of-the art design featuring a contemporary style that delivers exceptional safety and security.

Suitable for residential, new building and renovation market applications.

The Pull Handle lockset incorporates innovative safety features from the Paradigm 005 Deadbolt and is manufactured with high end 304 grade stainless steel that comes in a brushed satin finish.

### **Key Features**

- Three function modes with DualSelect® provides combination of convenience and security
- High security cut resistant stainless steel bolt
- Brushed 304 Grade Stainless Steel Pull Handles
- Concealed screw fixings gives a neat and clean appearance
- Safety Release™ automatically unlocks internal knob upon key entry from outside
- LockAlert® indicator shows lock status at a glance

### **Restricted Special Keying**

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.


Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.


Product Details				
Dimensions	External handle length - 600mm Internal handle length - 500mm Handle width - 30mm			
Backset	60mm-70mm adjustable			
Bolt	High security cut resistant			
Cylinder	5 pin tumbler mechanism Brass cylinder and brass barrel			
Door Thickness	32 - 48mm 32-36mm doors require a spacer (Included)			
Finishes	Satin Stainless Steel (SSS)			
Materials	304 Grade Stainless Steel			
Strike	Box strike with concealed crossgrain door frame strengthening screw			
Magnets	Door Magnets included to hold the door(s) in position when in passage mode (free to enter from outside and free to exit from inside)			
Keying	<ul> <li>Supplied individually keyed with two keys per lock</li> <li>78,000 key combinations</li> <li>Key blank KB401B5P</li> </ul>			


	• Key Didlik K640 I DOY
Standards a	nd Compliance
SL8	(Security) Australian Lock Standard (AS4145.2 - 2008)
D8	(Durability) Australian Lock Standard (AS4145.2 - 2008)
<b>C6</b>	(Corrosion) Australian Lock Standard AS4145.2 - 2008)
K5	(Key Security) Australian Lock Standard AS4145.2 - 2008)



### Pull Handle Lockset

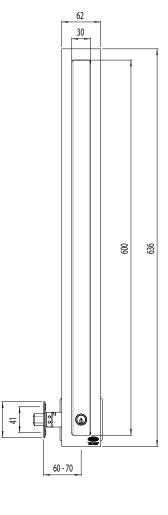





Exterior View

Side View

Interior View



### DualSelect®

Turn the key for safety mode. Turn the key further to select secure mode.



### $SafetyRelease^{\scriptscriptstyle \mathsf{TM}}$

Minimises the risk of being locked in.



### **Corrosion Resistant**

Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.



### **Kinetic Defence**® Bump and pick resistant.



### Counterbalance Bolt

Proportionally distributes the load between the door and door frame.



### 2 Keys Included

Can be keyed alike to other Lockwood door locks.



### **Door Thickness**

32mm to 48mm.



### LockAlert®

Interior Indicator shows lock status at a glance.



### Safety Mode

Securely locked from outside and free from inside.



### Secure Mode


Securely locked from both inside and outside. For when nobody is home.



### Passage Mode

Free to enter from outside and free to exit from inside.

# Paradigm® Pull Handle Lockset - Deadlatch

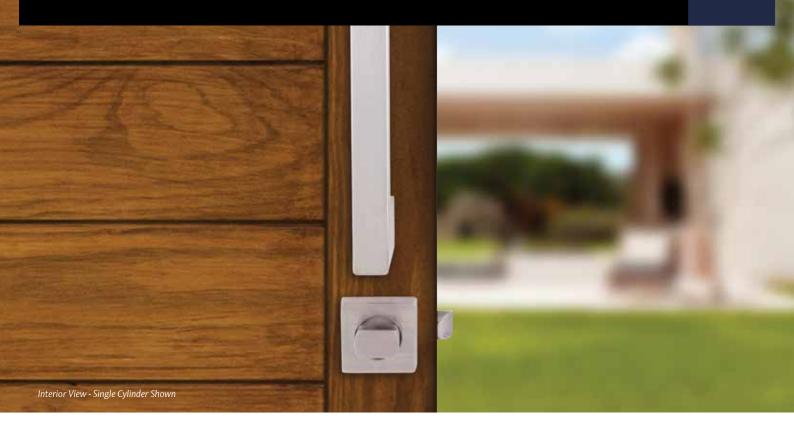

The Australian designed Paradigm® Pull Handle Lockset expresses superior state-of-the art design featuring a contemporary style that delivers exceptional safety and security. The Paradigm® Pull Handle latching lockset is available in single and double cylinder variants.

Both variants are specifically designed for semi-commercial and apartment building applications. The locksets have been successfully tested up to 2 hours (depending on the type of doorset) on fire assemblies in accordance with Australian Standard AS1905.1-2005, part 1:Fire Resistant Doorset

The Pull Handle lockset applies the innovative safety features from the Paradigm 005 Deadbolt into a latching lockset and is manufactured with high end 304 grade stainless steel that comes in a brushed satin finish.

### **Key Features**

- High security cut resistant Stainless
   Steel latch
- Brushed 304 grade Stainless Steel Pull Handle
- Concealed screw fixings for a neat and clean appearance
- Safety Release™ automatically unlocks internal knob upon key entry from outside\*
- LockAlert® indicator shows lock status at a glance\*
- \*Only available in double cylinder variant

### **Restricted Special Keying**

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.

Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

ь					_			
	ro	ZαII	117	-	1 1 1	ച	- n II	lle.
	15.07	uu	W I. 1		100		ra III	I IIIST

Froduct Details				
Dimensions	External handle length - 600mm Internal handle length - 500mm Handle width - 30mm			
Backset	60mm			
Latch	High security cut resistant Stainless Steel deadlatch			
Cylinder	5 pin tumbler mechanism Brass cylinder and brass barrel			
Door Thickness	32-48mm 32-36mm require a spacer (included)			
Finishes	Satin Stainless Steel (SSS)			
Materials	304 Grade Stainless Steel			
Keying	<ul> <li>Supplied individually keyed with two keys per lock</li> <li>78,000 key combinations</li> <li>Key blank KB401B5P</li> </ul>			

### Standards and Compliance



The Paradigm Pull Handle latching Lockset has been successfully tested up to 2 hours (depending on the type of doorset) on fire assemblies in accordance with Australian Standard AS1905.1-2005, part 1: Fire Resistant Doorset for commercial applications.

**SL7** (Security) Australian Lock Standard (AS4145.2 - 2008)

D8 (Durability) Australian Lock Standard (AS4145.2 - 2008)

(Corrosion) Australian Lock Standard AS4145.2 - 2008)


(Key Security) Australian Lock Standard AS4145.2 - 2008)


# Paradigm® Pull Handle Lockset - Deadlatch




Exterior Interior Double Interior Single Cylinder Cylinder

### **Pull Handle Lockset**

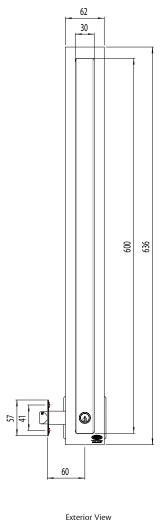






Interior View (Single Cylinder)



### SafetyRelease™\* Minimises the risk of being locked in.





### Corrosion Resitant

Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.



### **Door Thickness** 32mm to 48mm.



### 2 Keys Included

Can be keyed alike to other Lockwood door locks.



### LockAlert®\*

Interior Indicator shows lock status at a glance.



### Safety Mode

Securely locked from outside and free from inside.



### Secure Mode\*

Securely locked from both inside and outside. For when nobody is home.

\* Not available for Single Cylinder variant



The Australian designed Paradigm® Pull Handle Lockset expresses superior state-of-the art design featuring a contemporary style that delivers exceptional safety and security. The Paradigm® Dummy Handle is designed to be used along side the Paradigm Pull Handle lockset in double door applications.

Manufactured with high end 304 grade Stainless Steel that comes in a brushed satin finish, the Paradigm Dummy Handle provides premium quality with contemporary styling for modern double door entrances.

### **Key Features**

- Brushed 304 grade Stainless Steel Pull Handle
- Concealed screw fixings for a neat and clean appearance

#### Product Details

Dimensions External handle length - 600mm
Internal handle length - 500mm
Handle width - 30mm

**Door Thickness** 32-48mm

Finishes Satin Stainless Steel (SSS)


Materials 304 Grade Stainless Steel

# Paradigm® Pull Handle Lockset - Dummy Handle



### **Dummy Handle**

(Non-functioning) for double door application.

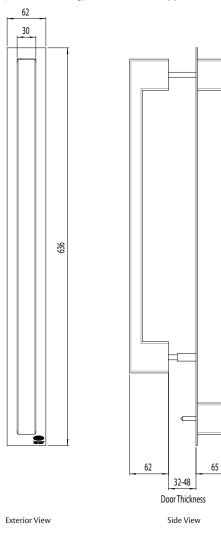



9

Interior View



### **Corrosion Resitant**

Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.



Door Thickness


32mm to 48mm.

# Paradigm® Pull Handle Locksets

### **Ordering Procedure**

Sample part number 005/DPHBSSS5PK is made up of several sections. Choose your product by selecting an option from each section.

### Paradigm® Pull Handle Locksets





Туре	
Double Cylinder Deadbolt	DPHB
Double Cylinder Deadlatch	DPHL
Single Cylinder Deadlatch	SPHL
Dummy Handle	PHD

SSS

Keying Options				
Keyed to Differ (Standard)				
Special Keying-Residential				
Keyed Alike 5P	5KA			
Keyed Alike 6P	6KA			
Project Keyed 5P	5PK			
Project Keyed 6P	6PK			
Restricted Profile 5P	5RP			

# Symmetry® Deadbolt







### Description

The Symmetry general purpose Deadbolts are standard security products that should be fitted with a Key in Knob or Key in Lever lockset for added safety and security.

### **Keying**


- Supplied individually keyed with two keys per lock
- 78,000 key combinations
- Key blank KB401B5P

### **Restricted Special Keying**

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.


Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

### **Bolt Dimensions**



### Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 31-45mm door thickness.



### Product Details

Backset	60mm to 70mm adjustable bolt
Bolt	Solid brass bolt with 25mm projection. Hardened insert in locking bolt
Cylinder	The one cylinder assembly solution "OneCyl®" has been designed for the Lockwood Symmetry Range, which grants the convenience of cylinder interchangeability. C4 brass cylinder assembly (6 pin compatible)

### Symmetry Everbrass® Guarantee



Lockwood Everbrass® product is coated both on the exterior and interior surfaces with a lifetime anti-tarnish finish. Lockwood warrants that Everbrass® branded product will not corrode, tarnish or discolour for a lifetime when properly installed and subject to no more than fair wear and tear.

### Symmetry 5 Year Finish Guarantee




Lockwood guarantees to replace Symmetry product if within five years from the proven date of purchase it tarnishes, discolours or corrodes when properly installed and subject to no more than fair wear and tear.


# Symmetry® Deadbolt


### **Single Cylinder**











Exterior

Interior



**Kinetic Defence**®
Bump and pick resistant.



### 2 Keys Included

Can be keyed alike to other Lockwood door locks.



### Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 31-45 door thickness.

### ONECYL® Cylinder Solution

Finish	Trade Pack	Display Pack
Polished Brass	7106PB	7106PBDP
Polished Stainless Steel	7106PSS	_
Satin Stainless Steel	7106SSS	7106SSSDP
Satin Chrome Brushed	7106SC	_

#### Product Details


Door Thickness	31 mm to 45mm 31 to 41mm requires spacer ring (included)	
Finishes	Polished Brass ( <b>PB</b> ) Polished Stainless Steel ( <b>PSS</b> ) Satin Stainless Steel ( <b>SSS</b> ) Satin Chrome Brushed ( <b>SC</b> )	
Handing	Suits left or right hand opening doors	
Keying	Operated by key from outside and turn knob inside	


# Symmetry® Deadbolt

### **Double Cylinder**









Exterior

Interior



**Kinetic Defence**®
Bump and pick resistant.



2 Keys Included

Can be keyed alike to other Lockwood door locks.



Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 31-45mm door thickness.

### ONECYL® Cylinder Solution

Finish	Trade Pack	Display Pack
EverBrass	7107EVB	7107EVBDP
Polished Stainless Steel	7107PSS	7107PSSDP
Satin Stainless Steel	7107SSS	7107SSSDP

Pro			<b>D</b>		
EINA	ra II II	l l'ai si	II III 7-	· ir min i	111159


Door Thickness	31mm to 45mm *31 to 41mm requires spacer ring (included)
Finishes	EverBrass (EVB) Polished Stainless Steel (PSS) Satin Stainless Steel (SSS)
Handing	Suits left or right hand opening doors
Keying	Operated by key from both inside and outside

# Symmetry® Deadbolt - Accessory

### Adjustable 60-70mm Backset Bolt

Part Number 7541ASSS

**Finish** Satin Stainless Steel





Lockwood is the leading brand in the Australian locking industry. With an established reputation for high quality products, this iconic brand provides a wide range of locking solutions to residential housing, commercial, semi-commercial, building and industrial application markets. Lockwood is supported by an extensive distribution and after-sales support network. Our customers include retailers, architects, trade and industrial personnel, locksmiths and security dealers.

**ASSA ABLOY** is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

**ASSA ABLOY** is represented in all major regions, in both mature and emerging markets, with leading positions in Australia, Europe and North America.



### The Lockwood 25 Year Mechanical Warranty

Our belief that we manufacture the finest premium products available in today's market place is backed by the Lockwood 25 Year Mechanical Warranty, ensuring that Lockwood continues to keep Australians safe by delivering security and peace of mind.

For warranty terms and conditions, please visit www.lockweb.com.au or call 1300WARRANTY

ASSA ABLOY Australia Pty Ltd 235 Huntingdale Road Oakleigh, Victoria, 3166 Australia

1300 LOCK UP (1300 562 587) lockweb.com.au

ASSA ABLOY New Zealand Ltd 6 Armstrong Road Albany, Auckland, 0632 New Zealand

info.nz@assaabloy.com Telephone +64 9415 7111 assaabloy.co.nz

