

ic®
AquaDefense

se, one-component,
drying flexible
brane for waterproofing
nic, marble and mosaics,
and exterior.

nt, ready-to-use

at required
st 3 hours
on after just 4 hours
hesive

with the product back
1 day
ts: up to 2 points
erials

Ready-to-use!




how to use

balconies, terraces, bathrooms, shower booths and damp
before laying coatings
er, brush or trowel
and re-used with no waste if kept in its original packaging

of the product

1 kg/m² for two coats (1.3 kg/m² per mm of thickness).
suitable for covering 15 m²
original packaging: 24 months

Mapelastic AquaDefense

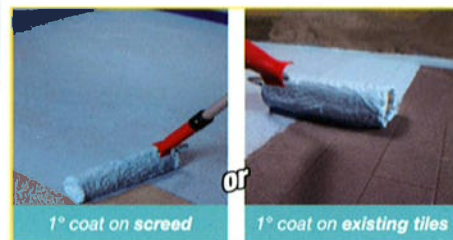

Crack-bridging

+23 °C (EN 14891-A.8.2)

3.1 mm

-5 °C (EN 14891-A.8.3)

2.0 mm

-20 °C (EN 14891-A.8.3)

0.9 mm