

Rinnai

Hotflo

Electric Storage
Systems





Benefits at a glance

Features

- Full range of capacities to suit all applications – 25 to 400 litres*
- Standard sizing perfect for emergency changeover
- Single or twin element configurations
- Complete range of elements and anodes
- Dual handed for flexible installation
- Suitable for internal and external installations[#]
- 7 year cylinder warranty on 25L and 50L models
- 10 Year cylinder on 80L to 400L models
- Class leading Rinnai quality and durability

*250L and 315L EHFA models shown.

[#]25 and 50L internal installation only.

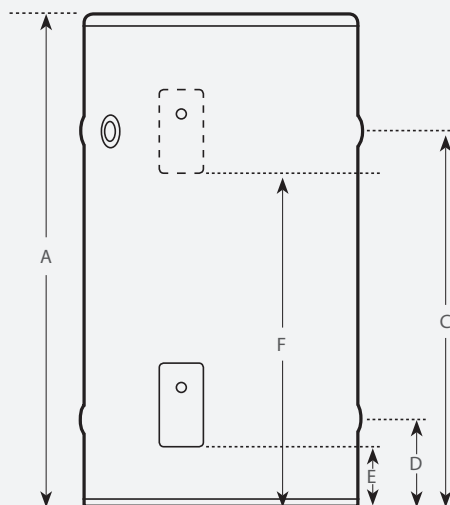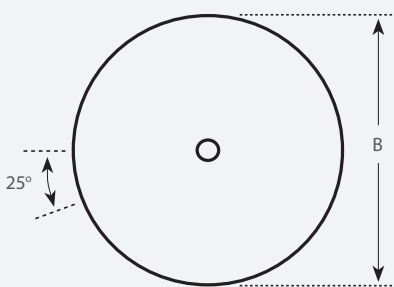

Product Specifications

| Models | | 25L EHF | 25L EHF | 50L EHF | 50L EHF | 80L EHF | 125L EHF | 160L EHFA | 160L EHFD | 250L EHFA | 315L EHFA | 400L EHF |
|-------------------------------|---|---------|---------|---------|---------|---------|----------|-----------|-----------|-----------|-----------|----------|
| Total Height (mm) | A | 452 | 452 | 694 | 694 | 900 | 1245 | 1620 | 1313 | 1478 | 1770 | 1820 |
| Width incl. PTR Valve (mm) | | 490 | 490 | 490 | 490 | 564 | 590 | 564 | 606 | 674 | 674 | 760 |
| Diameter (mm) | B | 415 | 415 | 415 | 415 | 500 | 515 | 500 | 537 | 605 | 605 | 685 |
| Outlet Height (mm) | C | 297 | 297 | 524 | 524 | 1132 | 1020 | 1457 | 1107 | 1248 | 1541 | 1545 |
| Inlet Height (mm) | D | 153 | 153 | 158 | 158 | 162 | 225 | 162 | 186 | 210 | 210 | 260 |
| Electrical Entry - Lower (mm) | E | 80 | 80 | 80 | 80 | 87 | 155 | 87 | 110 | 135 | 135 | 135 |
| Electrical Entry - Upper (mm) | F | N/A | N/A | N/A | N/A | N/A | N/A | 1039 | N/A | 985 | 1225 | 1224 |
| Dry Weight (kg) | | 20 | 20 | 27 | 27 | 46 | 56 | 59 | 51 | 72 | 83.5 | 102 |

Technical Specifications

| Models | 25L EHF | 25L EHF | 50L EHF | 50L EHF | 80L EHF | 125L EHF | 160L EHFA | 160L EHFD | 250L EHFA | 315L EHFA | 400L EHF | |
|--|---------|----------|---------|----------|---------------|---------------|---------------|-----------|---------------|-----------|----------|----|
| Storage Capacity (L) | 33 | 33 | 55 | 55 | 84 | 140 | 172 | 170 | 279 | 334 | 424 | |
| Hot Water Delivery (L) | 25 | 25 | 50 | 50 | 80 | 125 | 160 | 160 | 250 | 315 | 400 | |
| Element Size (kW) | 3.6 | 1.8, 2.4 | 3.6 | 1.8, 2.4 | 1.8, 2.4, 3.6 | 1.8, 2.4, 3.6 | 1.8, 2.4, 3.6 | 2.4, 3.6 | 2.4, 3.6, 4.8 | 3.6, 4.8 | 3.6, 4.8 | |
| Boost Capacity (Twin element only) (L) | N/A | N/A | N/A | N/A | N/A | N/A | 49 | N/A | 65 | 76 | 84 | |
| Incl. PTR Valve (kPa) | | | | | | 1000 | | | | | 850 | |
| ECV (kPa) | | | | | | 850 | | | | | 700 | |
| Max. Inlet Pressure with ECV (kPa) | | | | | | 680 | | | | | 550 | |
| PLV with ECV (kPa) | | | | | | 500 | | | | | | |
| Max. Inlet Pressure without ECV (kPa) | | | | | | 800 | | | | | | |
| PLV without ECV (kPa) | | | | | | 500 | | | | | | |
| Max. Thermostat Setting (°C) | | | | | | 75 | | | 70 | 70 | 70 | 75 |
| Ingress Protection Rating | | | | | | IPX4 | | | | | | |
| Electrical Supply | | | | | | 240V - @50Hz | | | | | | |
| Tank Body Colour | White | White | White | White | Dune | Dune | Dune | Dune | Dune | Dune | Dune | |
| Port Size (mm) | | | | | | 20 | | | | | | |

#Hard water anodes available on all models.

Warranty

| Domestic Warranty | 25L & 50L | 80L, 125L, 160L, 250L, 315L & 400L |
|-------------------|-----------|------------------------------------|
| Parts and Labour | 1 Year | 1 Year |
| Cylinder | 7 Years | 10 Years |

Please note: Rinnai Australia reserves the right to make modifications and change specifications without notice. However, we will endeavour to communicate major changes well before implementation. Dimensions are subject to production tolerances and may vary slightly from those given. For full definitions of Domestic and Commercial use along with the full warranty conditions and exclusions, please refer to the owners manual. The images reproduced in this brochure are not to scale and may vary to the colour of the represented product.

Rinnai Australia Pty Ltd
ABN 74 005 138 769
100 Atlantic Drive,
Keysborough, Victoria 3173
For further information visit
www.rinnai.com.au
or call 1300 555 545

Rinnai

TOTAL HOME COMFORT



HOT WATER



HEATING



COOLING