

The Angelique's timeless design features generous depth & additional features such as arm rests & ergonomic lumbar support that set the benchmark in corner bath design. Centre waste position.

✓ Molded arm rests

✓ Lumbar support

✓ Suitable for dual bathing

■ Slip resistant pattern



## **ANGELIQUE BATH**

SIZE (l) x (w) x (d) mm	CAPACITY*	NET WEIGHT	CODE
1295 x 1295 x 480	179L	20.3kg	AN1295W
1465 x 1465 x 480	259L	24.5kg	AN1465W



- 15 YR WARRANTY\*
- AS/NZ Standard 2013/1995
- Steel rod reinforced rim
- Double reinforced bath base



## **ANGELIOUE SANTAI SPA BATH** • 12 JETS

SIZE (l) $x$ (w) $x$ (d) mm	CAPACITY*	<b>NET WEIGHT</b>	CODE
1295 x 1295 x 480	179L	25.3kg	AN1295SAN12JW
1465 x 1465 x 480	259L	45kg	AN1465SAN12JW

- 10 YR WARRANTY\* SPA SHELL
- 5 YR WARRANTY\* PUMP, JETS & FITTINGS
- AS/NZ Standard AS3861/1991
- Steel rod reinforced rim
- Double reinforced bath base
- 6 x low profile Mod centro jets
- 6 x low profile Mod minijets
- 1 x low profile Mod suction
- 1 x Mod power button (rim mounted)
- 2 x Mod air controls (rim mounted)
- 750 watt auto heat boost pump



## **ANGELIQUE CONTOUR SPA BATH** •• 14 JETS

SIZE (l) x (w) x (d) mm	CAPACITY*	NET WEIGHT	CODE
1295 x 1295 x 480	179L	35.3kg	AN1295CNSPAWC
1465 x 1465 x 480	259L	45kg	AN1465CNSPAWC

- 10 YR WARRANTY\* SPA SHELL
- 5 YR WARRANTY\*- PUMP, JETS &
- AS/NZ Standard AS3861/1991
- Steel rod reinforced rim
- Double reinforced bath base
- 6 x flush C-Lenda™ centro jets
- 8 x flush C-Lenda™ mini jets
- 2 x flush C-Lenda™ air controls
- 1 x flush C-Lenda™ suction
- 1 x Sensa-Touch pad control (rim mounted)
- 750 watt 3-stage heat boost pump








SIZE (l) $x$ (w) $x$ (d) $mm$	CAPACITY*	<b>NET WEIGHT</b>	CODE
1295 x 1295 x 480	179L	60.3kg	AN1295DVSPAWC
1465 x 1465 x 480	259L	75kg	AN1465DVSPAWC

- 10 YR WARRANTY\* SPA SHELL
- 5 YR WARRANTY\* PUMP, JETS &
- AS/NZ Standard AS3861/1991
- Steel rod reinforced rim
- Double reinforced bath base
- 6 x adjustable flush C-Lenda™ centro jets
- 12 x adjustable flush C-Lenda™
- 2 x flush C-Lenda™ air controls
- 1 x flush C-Lenda™ suction
- Spa Key remote control
- 1100 watt spa key heat boost pump

\*Capacity 200mm below the bath rim

ANGELIQUE ACCESSORIES	ВАТН	SANTAI SPA BATH	CONTOUR SPA BATH	DOLCE VITA SPA BATH
Corner Base Support Frame	Optional	Optional	Optional	~
Sienna Headrests Black/White	Optional	Optional	<b>✓</b> x 2	✓ x 2
Overflow	Optional	Optional	Optional	Optional
Plug & Waste	Optional	Optional	Optional	Optional

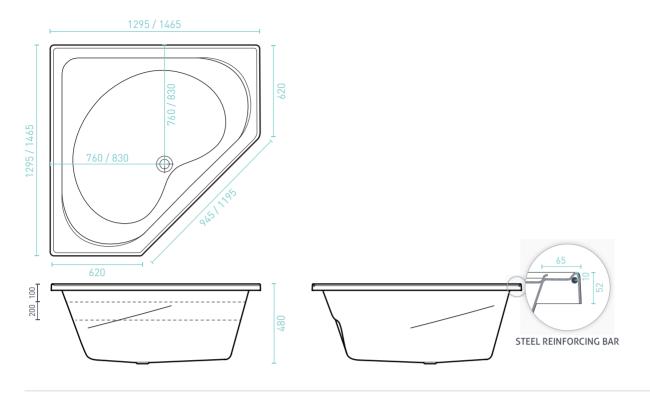

## **SPA BATH ORDER FORM**

Spa baths made to order on receipt of order form. Please allow 15 working days for completion & dispatch. We recommend filling out your SPA BATH ORDER FORM with your qualified spa bath installer.

COMPANY & BRANCH:			PHONE NO:	
CONTACT:OR	DER NO:		DATE:	
MODEL: SIZ	Æ:	QTY:	RANGE SANTAI CONTOUR DOLCE VITA	
SANTAI SPA BATH UPGRADE OPTIONS  PUMP UPGRADE - Manual Xtra-Heat Boost Pump (RRP  EZI FRAME - Supplied  Factory Fitted  HEADRESTS - White QTY:  Black QTY:  (RR	BASE SU		Touch Pad Control 3-Stage Heat (RRP \$425) ☐ Factory Fitted ☐ Overflow ☐	
CONTOUR SPA BATH UPGRADE OPTIONS  EZI FRAME - Supplied ☐ Factory Fitted ☐  HEADREST COLOUR - White ☐ Black ☐	BASE SU	JPPORT FRAME -	Factory Fitted  Overflow	
DOLCE VITA SPA BATH OPTIONS  JET COLOUR - Chrome □ White □ Black □	e headre	ST COLOUR - Wh	ite □ Black □	
<ul> <li>SPA PUMP NOTES</li> <li>1. The Spa Pump does not fit directly underneath the baths perimeter</li> <li>3. Waste positions can not be changed</li> </ul>		2. The Spa Pump should be easily accessible for maintenance 4. The Spa Pump controls will always be at the front, unless indicated below		
PLEASE INDICATE ON THE DIAGRAMS BELOW: (please	refer to the technical drawings b	efore choosing yo	ur pump position)	
SHOWER HEAD POSITION (if applicable) The Spa Pump controls CAN NOT be on the same end as the shower head.	The recom is 1.2 metr Is the dista	mended max. distance es. nce between the bath	nm of pipework is supplied) between the bath & spa pump and the spa pump over 300mm extra pipework is required  C FRONT B	
CUSTOMER NAME:	CUSTOM	ER SIGNATURE:		
CUSTOMER EMAIL:	CUSTOM	ER PHONE NO: _		



\*Whilst every effort is made to adhere to published jet & fittings positions, variation to specifications may occur without notice.

